



## Technical Features



Range  
Up to 4.2 m



Heating types  
E : electrical 3 stages  
P : water  
A : unheated



Casing  
Galvanised Steel [\*]



Airflow / Length  
1560 - 6940 m<sup>3</sup>/h  
1 m to 3 m



Heating capacity  
E : 2 - 30.5 kW  
P : 7.13 - 39.9 kW



Grille type  
Micro-perforated  
with prefilter function



Fans  
Centrifugal  
5-speed



Control  
A, E : Plug&Play Advanced PRO  
P : Plug&Play manual regulator  
+ IR remote control



Outlet lamellas  
Aluminium, airfoil type  
Adjustable 0-15° each side

[\*] Customizable dimensions on request

WINDBOX air curtains range provide equipment suitable for all types of commercial entrances. A compact and robust air curtain from our standard range with a timeless design, ready for visible installation over the door and prepared for multiple false ceiling installation configurations. Casing painted in RAL 9016. Other colors are available on request.

This air curtain model works with low noise double-inlet centrifugal fans with external rotor motor. EC models assembled with very low consumption efficiency fans.

"A", "E" type includes Advanced PRO control with LCD display and integrated thermostat, door contact, 23ft / 7m RJ45 cable and remote control.  
"P" type includes Plug&Play control with 7 m RJ45 cable, infrared remote control and magnetic door contact. For electrical heated models also thermostat.

## Certifications

(<sup>1</sup>) AMCA Certified:



Energy Codes ASHRAE 90.1-2019, IECC 2018, and ASHRAE 189.1 vestibule exception validated by AMCA certification. Refer to Velocity Projection Chart below for information.  
Airtècnics certifies that the air curtains shown here in are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Program. Rated data shown is for base (unheated) units. The AMCA Certified Ratings Seal applies to airflow rate, average outlet velocity, outlet velocity uniformity, velocity projection and power rating at free delivery only.



| AMCA Certified VELOCITY PROJECTION:<br>Model Windbox ECG 1000A-240V 60Hz |      |      |      |      |
|--------------------------------------------------------------------------|------|------|------|------|
| Distance from Nozzle (mm)                                                | 1000 | 2000 | 3000 | 4000 |
| Core Velocity (m/s)                                                      | 7.71 | 6.09 | 4.86 | 4.15 |
| Uniformity (%)                                                           | 84%  | 93%  | 95%  | 93%  |



| 0    | Core Velocity | Uniformity |
|------|---------------|------------|
| 1000 | 7.71m/s       | 84%        |
| 2000 | 6.09m/s       | 93%        |
| 3000 | 4.86m/s       | 95%        |
| 4000 | 4.15m/s       | 93%        |

CSA Certified:





✱ UNHEATED 208V-1ph~60Hz

| Model          | Airflow<br>m <sup>3</sup> /h | Ventilation<br>power<br>208V-1ph~60Hz<br>kW | Ventilation<br>current<br>208V-1ph~60Hz<br>A | Outlet<br>Uniformity<br>% | Outlet<br>maximum<br>velocity<br>m/s | Outlet<br>average<br>velocity<br>m/s | Noise<br>level<br>(5 m)<br>dB(A) | Weight<br>kg |
|----------------|------------------------------|---------------------------------------------|----------------------------------------------|---------------------------|--------------------------------------|--------------------------------------|----------------------------------|--------------|
| M 1000 A (¹)   | 1620                         | 0.238                                       | 1.14                                         | 58                        | 15.91                                | 11.69                                | 54                               | 31           |
| M 1500 A (¹)   | 2430                         | 0.357                                       | 1.70                                         | 58                        | 15.91                                | 11.69                                | 55                               | 46           |
| M 2000 A (¹)   | 3240                         | 0.476                                       | 2.27                                         | 58                        | 15.91                                | 11.69                                | 56                               | 58           |
| M 2500 A (¹)   | 4050                         | 0.595                                       | 2.84                                         | 58                        | 15.91                                | 11.69                                | 57                               | 72           |
| M 3000 A (¹)   | 4860                         | 0.714                                       | 3.41                                         | 58                        | 15.91                                | 11.69                                | 58                               | 86           |
| G 1000 A       | 2145                         | 0.357                                       | 1.70                                         | -                         | -                                    | -                                    | 56                               | 43           |
| G 1500 A       | 2860                         | 0.476                                       | 2.27                                         | -                         | -                                    | -                                    | 57                               | 51           |
| G 2000 A       | 4290                         | 0.714                                       | 3.41                                         | -                         | -                                    | -                                    | 58                               | 80           |
| G 2500 A       | 5005                         | 0.833                                       | 3.97                                         | -                         | -                                    | -                                    | 59                               | 84           |
| G 3000 A       | 5720                         | 0.952                                       | 4.54                                         | -                         | -                                    | -                                    | 60                               | 95           |
| ECG 1000 A (¹) | 2445                         | 0.350                                       | 2.63                                         | 91                        | 15.97                                | 13.97                                | 60                               | 43           |
| ECG 1500 A (¹) | 3260                         | 0.466                                       | 3.50                                         | 91                        | 15.97                                | 13.97                                | 61                               | 51           |
| ECG 2000 A (¹) | 4890                         | 0.699                                       | 5.25                                         | 91                        | 15.97                                | 13.97                                | 62                               | 80           |
| ECG 2500 A (¹) | 5705                         | 0.816                                       | 6.13                                         | 91                        | 15.97                                | 13.97                                | 63                               | 84           |
| ECG 3000 A (¹) | 6520                         | 0.932                                       | 7.00                                         | 91                        | 15.97                                | 13.97                                | 64                               | 95           |

✱ UNHEATED 240V-1ph~60Hz

| Model          | Airflow<br>m <sup>3</sup> /h | Ventilation<br>power<br>240V-1ph~60Hz<br>kW | Ventilation<br>current<br>240V-1ph~60Hz<br>A | Outlet<br>Uniformity<br>% | Outlet<br>maximum<br>velocity<br>m/s | Outlet<br>average<br>velocity<br>m/s | Noise<br>level<br>(5 m)<br>dB(A) | Weight<br>kg |
|----------------|------------------------------|---------------------------------------------|----------------------------------------------|---------------------------|--------------------------------------|--------------------------------------|----------------------------------|--------------|
| M 1000 A (¹)   | 1720                         | 0.293                                       | 1.20                                         | 58                        | 16.45                                | 12.20                                | 55                               | 31           |
| M 1500 A (¹)   | 2580                         | 0.439                                       | 1.80                                         | 58                        | 16.45                                | 12.20                                | 56                               | 46           |
| M 2000 A (¹)   | 3440                         | 0.585                                       | 2.40                                         | 58                        | 16.45                                | 12.20                                | 57                               | 58           |
| M 2500 A (¹)   | 4300                         | 0.732                                       | 3.00                                         | 58                        | 16.45                                | 12.20                                | 58                               | 72           |
| M 3000 A (¹)   | 5160                         | 0.878                                       | 3.60                                         | 58                        | 16.45                                | 12.20                                | 59                               | 86           |
| G 1000 A       | 2280                         | 0.439                                       | 1.80                                         | -                         | -                                    | -                                    | 57                               | 43           |
| G 1500 A       | 3040                         | 0.585                                       | 2.40                                         | -                         | -                                    | -                                    | 58                               | 51           |
| G 2000 A       | 4560                         | 0.878                                       | 3.60                                         | -                         | -                                    | -                                    | 59                               | 80           |
| G 2500 A       | 5320                         | 1.024                                       | 4.20                                         | -                         | -                                    | -                                    | 60                               | 84           |
| G 3000 A       | 6080                         | 1.171                                       | 4.80                                         | -                         | -                                    | -                                    | 61                               | 95           |
| ECG 1000 A (¹) | 2600                         | 0.454                                       | 3.00                                         | 87                        | 17.14                                | 15.32                                | 61                               | 43           |
| ECG 1500 A (¹) | 3470                         | 0.573                                       | 3.70                                         | 91                        | 16.52                                | 14.57                                | 62                               | 51           |
| ECG 2000 A (¹) | 5200                         | 0.908                                       | 6.00                                         | 87                        | 17.14                                | 15.32                                | 63                               | 80           |
| ECG 2500 A (¹) | 6070                         | 1.027                                       | 6.70                                         | 89                        | 16.77                                | 14.87                                | 64                               | 84           |
| ECG 3000 A (¹) | 6940                         | 1.146                                       | 7.40                                         | 91                        | 16.52                                | 14.57                                | 65                               | 95           |

(¹) AMCA Certified.



## ELECTRIC HEATED 208V-1ph~60Hz

| Model                     | Airflow | Electrical heating capacity <sup>(2)</sup><br>208V-3ph~60Hz | Electrical heating capacity <sup>(2)</sup><br>460V-3ph~60Hz | Electrical heating capacity <sup>(2)</sup><br>480V-3ph~60Hz | Electrical heating capacity <sup>(2)</sup><br>575V-3ph~60Hz | Ventilation power<br>208V-1ph<br>~60Hz | Ventilation current<br>208V-1ph<br>~60Hz | Noise level<br>(5 m) | Weight |
|---------------------------|---------|-------------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------|----------------------------------------|------------------------------------------|----------------------|--------|
|                           | m3/h    | kW                                                          | kW                                                          | kW                                                          | kW                                                          | kW                                     | A                                        | dB(A)                | kg     |
| M 1000 E <sup>(1)</sup>   | 1590    | 2/4/6                                                       | 2/4.5/6.5                                                   | 2.5/5/7.5                                                   | 3.5/3.5/7                                                   | 0.238                                  | 1.14                                     | 54                   | 37     |
| M 1500 E <sup>(1)</sup>   | 2385    | 3/6/9                                                       | 3/6.5/9.5                                                   | 3.5/7/10.5                                                  | 5/5/10                                                      | 0.357                                  | 1.70                                     | 55                   | 57     |
| M 2000 E <sup>(1)</sup>   | 3180    | 4/8/12                                                      | 4/8.5/12.5                                                  | 4.5/9/13.5                                                  | 6.5/6.5/13                                                  | 0.476                                  | 2.27                                     | 56                   | 75     |
| M 2500 E <sup>(1)</sup>   | 3975    | 5/8/13                                                      | 5/10/15                                                     | 5.5/11/16.5                                                 | 8/8/16                                                      | 0.595                                  | 2.84                                     | 57                   | 94     |
| M 3000 E <sup>(1)</sup>   | 4770    | 6.5/8/14.5                                                  | 6/12/18                                                     | 6.5/13/19.5                                                 | 9.5/9.5/19                                                  | 0.714                                  | 3.41                                     | 58                   | 112    |
| G 1000 E                  | 2115    | 2.5/5/7.5                                                   | 2.5/5/7.5                                                   | 3/5.5/8.5                                                   | 3.5/4/7.5                                                   | 0.357                                  | 1.70                                     | 56                   | 52     |
| G 1500 E                  | 2820    | 3.5/6.5/10                                                  | 3.5/7/10.5                                                  | 4/7.5/11.5                                                  | 5/5.5/10.5                                                  | 0.476                                  | 2.27                                     | 57                   | 63     |
| G 2000 E                  | 4230    | 5/9/14                                                      | 5/10.5/15.5                                                 | 5.5/11/16.5                                                 | 6.5/8/14.5                                                  | 0.714                                  | 3.41                                     | 58                   | 100    |
| G 2500 E                  | 4935    | 5.5/9/14.5                                                  | 6/12/18                                                     | 6.5/13/19.5                                                 | 8/9.5/17.5                                                  | 0.833                                  | 3.97                                     | 59                   | 106    |
| G 3000 E                  | 5640    | 6.5/8/14.5                                                  | 6/12/18                                                     | 6.5/13/19.5                                                 | 9.5/9.5/19                                                  | 0.952                                  | 4.54                                     | 60                   | 120    |
| ECG 1000 E <sup>(1)</sup> | 2415    | 4/8/12                                                      | 4/8/12                                                      | 4.3/8.7/13                                                  | 4/8/12                                                      | 0.350                                  | 2.63                                     | 60                   | 52     |
| ECG 1500 E <sup>(1)</sup> | 3220    | 6/9.5/15.5                                                  | 5.5/10.5/16                                                 | 5.8/11.7/17.5                                               | 5.5/11/16.5                                                 | 0.466                                  | 3.50                                     | 61                   | 63     |
| ECG 2000 E <sup>(1)</sup> | 4830    | 5/9/14                                                      | 8/16.5/24.5                                                 | 8.8/17.7/26.5                                               | 8/16/24                                                     | 0.699                                  | 5.25                                     | 62                   | 100    |
| ECG 2500 E <sup>(1)</sup> | 5635    | 5.5/9/14.5                                                  | 9.5/18.5/28                                                 | 10.2/20.3/30.5                                              | 9.5/19/28.5                                                 | 0.816                                  | 6.13                                     | 63                   | 106    |
| ECG 3000 E <sup>(1)</sup> | 6440    | 6.5/8/14.5                                                  | 9.5/18.5/28                                                 | 10.2/20.3/30.5                                              | 9.5/19/28.5                                                 | 0.932                                  | 7.00                                     | 64                   | 120    |

For 208V~3ph~60Hz air curtains there is only needed to connect three-phase power supply.

For the rest of air curtains, there is needed to connect both three-phase (for electrical heating) and single phase (for fans).

## ELECTRIC HEATED 240V-1ph~60Hz

| Model                     | Airflow | Electrical heating capacity <sup>(2)</sup><br>208V-3ph~60Hz | Electrical heating capacity <sup>(2)</sup><br>460V-3ph~60Hz | Electrical heating capacity <sup>(2)</sup><br>480V-3ph~60Hz | Electrical heating capacity <sup>(2)</sup><br>575V-3ph~60Hz | Ventilation power<br>240V-1ph<br>~60Hz | Ventilation current<br>240V-1ph<br>~60Hz | Noise level<br>(5 m) | Weight |
|---------------------------|---------|-------------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------|----------------------------------------|------------------------------------------|----------------------|--------|
|                           | m3/h    | kW                                                          | kW                                                          | kW                                                          | kW                                                          | kW                                     | A                                        | dB(A)                | kg     |
| M 1000 E <sup>(1)</sup>   | 1690    | 2.5/5/7.5                                                   | 3.3/6.7/10                                                  | 3.7/7.3/11                                                  | 3.5/7/10.5                                                  | 0.293                                  | 1.20                                     | 55                   | 37     |
| M 1500 E <sup>(1)</sup>   | 2535    | 3/6.5/9.5                                                   | 4.8/9.7/14.5                                                | 5.2/10.3/15.5                                               | 5/10/15                                                     | 0.439                                  | 1.80                                     | 56                   | 57     |
| M 2000 E <sup>(1)</sup>   | 3380    | 4/8/12                                                      | 6.5/13/19.5                                                 | 7/14/21                                                     | 6.5/13/19.5                                                 | 0.585                                  | 2.40                                     | 57                   | 75     |
| M 2500 E <sup>(1)</sup>   | 4225    | 5/8/13                                                      | 8.2/16.3/24.5                                               | 8.8/17.7/26.5                                               | 8/16/24                                                     | 0.732                                  | 3.00                                     | 58                   | 94     |
| M 3000 E <sup>(1)</sup>   | 5070    | 6.5/8/14.5                                                  | 9.3/18.7/28                                                 | 10.3/20.3/30.5                                              | 9.5/19/28.5                                                 | 0.878                                  | 3.60                                     | 59                   | 112    |
| G 1000 E                  | 2250    | 4/8/12                                                      | 4/8/12                                                      | 4.3/8.7/13                                                  | 4/8/12                                                      | 0.439                                  | 1.80                                     | 57                   | 52     |
| G 1500 E                  | 3000    | 6/9.5/15.5                                                  | 5.3/10.7/16                                                 | 5.8/11.7/17.5                                               | 5.5/11/16.5                                                 | 0.585                                  | 2.40                                     | 58                   | 63     |
| G 2000 E                  | 4500    | 5/9/14                                                      | 8.2/16.3/24.5                                               | 8.8/17.7/26.5                                               | 8/16/24                                                     | 0.878                                  | 3.60                                     | 59                   | 100    |
| G 2500 E                  | 5250    | 5.5/9/14.5                                                  | 9.3/18.7/28                                                 | 10.2/20.3/30.5                                              | 9.5/19/28.5                                                 | 1.024                                  | 4.20                                     | 60                   | 106    |
| G 3000 E                  | 6000    | 6.5/8/14.5                                                  | 9.3/18.7/28                                                 | 10.2/20.3/30.5                                              | 9.5/19/28.5                                                 | 1.171                                  | 4.80                                     | 61                   | 120    |
| ECG 1000 E <sup>(1)</sup> | 2550    | 4/8/12                                                      | 4/8/12                                                      | 4.3/8.7/13                                                  | 4/8/12                                                      | 0.454                                  | 3.00                                     | 61                   | 52     |
| ECG 1500 E <sup>(1)</sup> | 3400    | 6/9.5/15.5                                                  | 5.3/10.7/16                                                 | 5.8/11.7/17.5                                               | 5.5/11/16.5                                                 | 0.573                                  | 3.70                                     | 62                   | 63     |
| ECG 2000 E <sup>(1)</sup> | 5100    | 5/9/14                                                      | 8.2/16.3/24.5                                               | 8.8/17.7/26.5                                               | 8/16/24                                                     | 0.908                                  | 6.00                                     | 63                   | 100    |
| ECG 2500 E <sup>(1)</sup> | 5950    | 5.5/9/14.5                                                  | 9.3/18.7/28                                                 | 10.2/20.3/30.5                                              | 9.5/19/28.5                                                 | 1.027                                  | 6.70                                     | 64                   | 106    |
| ECG 3000 E <sup>(1)</sup> | 6800    | 6.5/8/14.5                                                  | 9.3/18.7/28                                                 | 10.2/20.3/30.5                                              | 9.5/19/28.5                                                 | 1.146                                  | 7.40                                     | 65                   | 120    |

<sup>(1)</sup> AMCA Certified.

<sup>(2)</sup> Under request other electrical heating power can be limited.



## WATER HEATED 208V-1ph~60Hz

| Model          | Airflow<br>m <sup>3</sup> /h | P86 (80/60°C)                      |                                 | P64 (60/40°C)                      |                                 | P54 (50/40°C)                      |                                 | Ventilation<br>power<br>208V-1ph<br>~60Hz | Ventilation<br>current<br>208V-1ph<br>~60Hz | Noise<br>level<br>(5 m) | Weight |
|----------------|------------------------------|------------------------------------|---------------------------------|------------------------------------|---------------------------------|------------------------------------|---------------------------------|-------------------------------------------|---------------------------------------------|-------------------------|--------|
|                |                              | Water<br>heating<br>capacity<br>kW | Water<br>pressure<br>drop<br>Pa | Water<br>heating<br>capacity<br>kW | Water<br>pressure<br>drop<br>Pa | Water<br>heating<br>capacity<br>kW | Water<br>pressure<br>drop<br>Pa | kW                                        | A                                           | dB(A)                   | kg     |
| M 1000 P       | 1560                         | 7.13                               | 150                             | 7.82                               | 4060                            | 7.76                               | 1130                            | 0.185                                     | 1.80                                        | 55                      | 35     |
| M 1500 P       | 2340                         | 13.71                              | 710                             | 12.51                              | 6000                            | 13.06                              | 4140                            | 0.278                                     | 2.70                                        | 56                      | 53     |
| M 2000 P       | 3120                         | 19.85                              | 1800                            | 16.68                              | 4440                            | 16.97                              | 1900                            | 0.370                                     | 3.59                                        | 57                      | 69     |
| M 2500 P       | 3900                         | 25.88                              | 3550                            | 20.80                              | 3570                            | 22.14                              | 3730                            | 0.463                                     | 4.49                                        | 58                      | 86     |
| M 3000 P       | 4680                         | 31.94                              | 6140                            | 25.91                              | 6280                            | 27.10                              | 5230                            | 0.555                                     | 5.39                                        | 59                      | 103    |
| G 1000 P       | 2055                         | 8.65                               | 210                             | 9.36                               | 5590                            | 9.44                               | 1600                            | 0.278                                     | 2.70                                        | 55                      | 35     |
| G 1500 P       | 2740                         | 15.15                              | 850                             | 13.89                              | 7220                            | 14.63                              | 5060                            | 0.370                                     | 3.59                                        | 56                      | 53     |
| G 2000 P       | 4110                         | 23.57                              | 2440                            | 20.02                              | 6140                            | 20.69                              | 2700                            | 0.555                                     | 5.39                                        | 57                      | 69     |
| G 2500 P       | 4795                         | 29.46                              | 4470                            | 23.88                              | 4560                            | 25.70                              | 4860                            | 0.648                                     | 6.29                                        | 58                      | 86     |
| G 3000 P       | 5480                         | 35.30                              | 7330                            | 28.79                              | 7570                            | 30.38                              | 6400                            | 0.740                                     | 7.19                                        | 59                      | 103    |
| ECG 1000 P (¹) | 2355                         | 11.34                              | 1290                            | 10.21                              | 6510                            | 10.37                              | 1900                            | 0.350                                     | 2.63                                        | 55                      | 35     |
| ECG 1500 P (¹) | 3140                         | 16.47                              | 990                             | 15.17                              | 8440                            | 16.10                              | 6000                            | 0.466                                     | 3.50                                        | 56                      | 53     |
| ECG 2000 P (¹) | 4710                         | 25.61                              | 2830                            | 21.84                              | 7170                            | 22.76                              | 3200                            | 0.699                                     | 5.25                                        | 57                      | 69     |
| ECG 2500 P (¹) | 5495                         | 32.04                              | 5180                            | 26.10                              | 5330                            | 28.29                              | 5770                            | 0.816                                     | 6.13                                        | 58                      | 86     |
| ECG 3000 P (¹) | 6280                         | 38.42                              | 8520                            | 31.49                              | 8860                            | 33.47                              | 7600                            | 0.932                                     | 7.00                                        | 59                      | 103    |

Water heated: connection pipes P86 and P64 are 2x G(BSPP) 3/4" female (male if lateral pipes), P54 2x G(BSPP) 1" male.  
P86 2 rows coil, P64 3 rows coil, P54 4 rows coil.

## WATER HEATED 240V-1ph~60Hz

| Model          | Airflow<br>m <sup>3</sup> /h | P86 (80/60°C)                      |                                 | P64 (60/40°C)                      |                                 | P54 (50/40°C)                      |                                 | Ventilation<br>power<br>240V-1ph<br>~60Hz | Ventilation<br>current<br>240V-1ph<br>~60Hz | Noise<br>level<br>(5 m) | Weight |
|----------------|------------------------------|------------------------------------|---------------------------------|------------------------------------|---------------------------------|------------------------------------|---------------------------------|-------------------------------------------|---------------------------------------------|-------------------------|--------|
|                |                              | Water<br>heating<br>capacity<br>kW | Water<br>pressure<br>drop<br>Pa | Water<br>heating<br>capacity<br>kW | Water<br>pressure<br>drop<br>Pa | Water<br>heating<br>capacity<br>kW | Water<br>pressure<br>drop<br>Pa | kW                                        | A                                           | dB(A)                   | kg     |
| M 1000 P       | 1660                         | 7.46                               | 160                             | 8.15                               | 4370                            | 8.12                               | 1230                            | 0.454                                     | 1.90                                        | 56                      | 35     |
| M 1500 P       | 2490                         | 14.26                              | 760                             | 13.04                              | 6460                            | 13.66                              | 4490                            | 0.681                                     | 2.85                                        | 57                      | 53     |
| M 2000 P       | 3320                         | 20.65                              | 1930                            | 17.39                              | 4780                            | 17.76                              | 2060                            | 0.908                                     | 3.80                                        | 58                      | 69     |
| M 2500 P       | 4150                         | 26.92                              | 3810                            | 21.69                              | 3840                            | 23.16                              | 4040                            | 1.135                                     | 4.75                                        | 59                      | 86     |
| M 3000 P       | 4980                         | 33.23                              | 6590                            | 27.01                              | 6760                            | 28.35                              | 5660                            | 1.363                                     | 5.70                                        | 60                      | 103    |
| G 1000 P       | 2190                         | 10.86                              | 1190                            | 9.75                               | 6000                            | 9.87                               | 1740                            | 0.681                                     | 2.85                                        | 56                      | 35     |
| G 1500 P       | 2920                         | 15.76                              | 910                             | 14.48                              | 7770                            | 15.30                              | 5490                            | 0.908                                     | 3.80                                        | 57                      | 53     |
| G 2000 P       | 4380                         | 24.51                              | 2620                            | 20.86                              | 6600                            | 21.64                              | 2930                            | 1.363                                     | 5.70                                        | 58                      | 69     |
| G 2500 P       | 5110                         | 30.64                              | 4790                            | 24.90                              | 4910                            | 26.88                              | 5270                            | 1.590                                     | 6.65                                        | 59                      | 86     |
| G 3000 P       | 5840                         | 36.73                              | 7870                            | 30.03                              | 8150                            | 31.79                              | 6940                            | 1.817                                     | 7.60                                        | 60                      | 103    |
| ECG 1000 P (¹) | 2500                         | 11.74                              | 1370                            | 10.59                              | 6950                            | 10.80                              | 2040                            | 0.454                                     | 3.00                                        | 61                      | 35     |
| ECG 1500 P (¹) | 3340                         | 17.09                              | 1050                            | 15.78                              | 9050                            | 16.80                              | 6480                            | 0.573                                     | 3.70                                        | 62                      | 53     |
| ECG 2000 P (¹) | 5000                         | 26.54                              | 3020                            | 22.70                              | 7670                            | 23.71                              | 3450                            | 0.908                                     | 6.00                                        | 63                      | 69     |
| ECG 2500 P (¹) | 5840                         | 32.25                              | 5530                            | 27.14                              | 5720                            | 29.51                              | 6220                            | 1.027                                     | 6.70                                        | 64                      | 86     |
| ECG 3000 P (¹) | 6680                         | 39.90                              | 9110                            | 32.77                              | 9510                            | 34.96                              | 8210                            | 1.146                                     | 7.40                                        | 65                      | 103    |

Water heated: connection pipes P86 and P64 are 2x G(BSPP) 3/4" female (male if lateral pipes), P54 2x G(BSPP) 1" male.  
P86 2 rows coil, P64 3 rows coil, P54 4 rows coil.

(¹) AMCA Certified.




Selection program




Dimensions


Horizontal installation

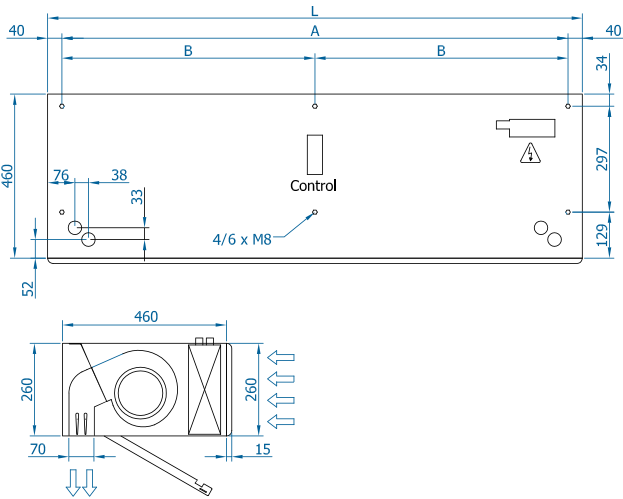


Vertical installation

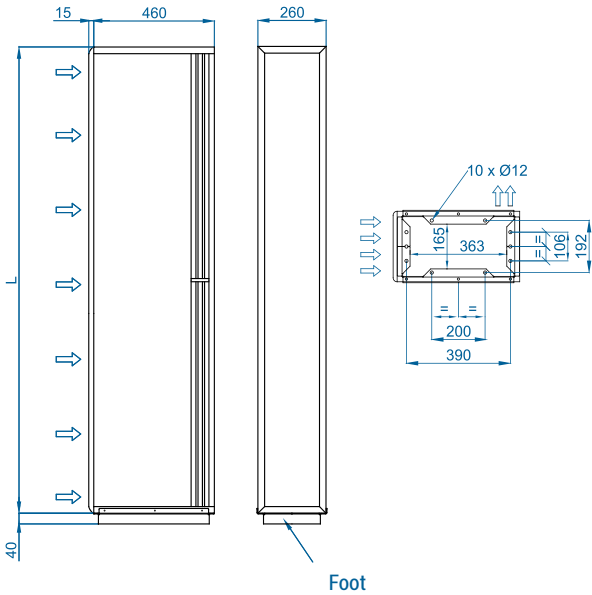

Inside ceiling surface mounting

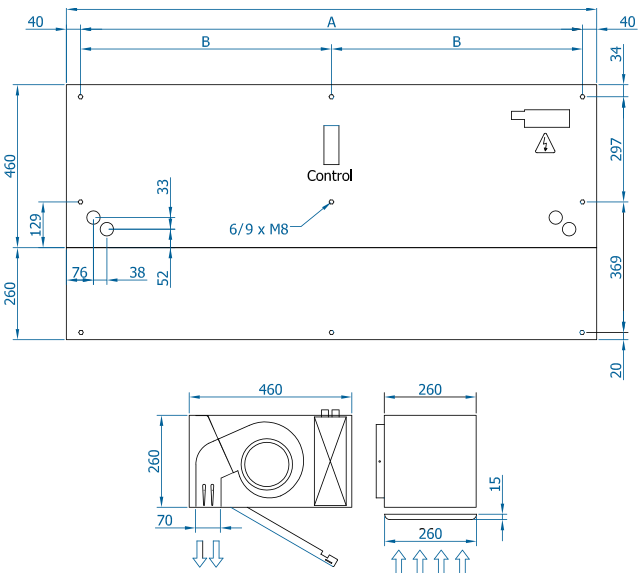

False ceiling invisible mounting

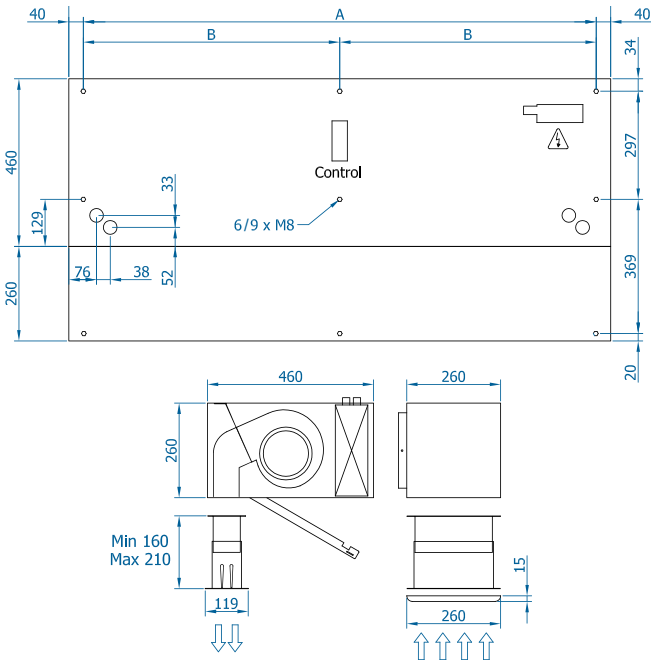

| L    | A    | B    |
|------|------|------|
| 1000 | 920  | -    |
| 1500 | 1420 | 710  |
| 2000 | 1920 | 960  |
| 2500 | 2420 | 1210 |
| 3000 | 2920 | 1460 |


Customizable dimensions on request.

CAD drawings, installation manuals  
and other documentation






## Installation Configurations

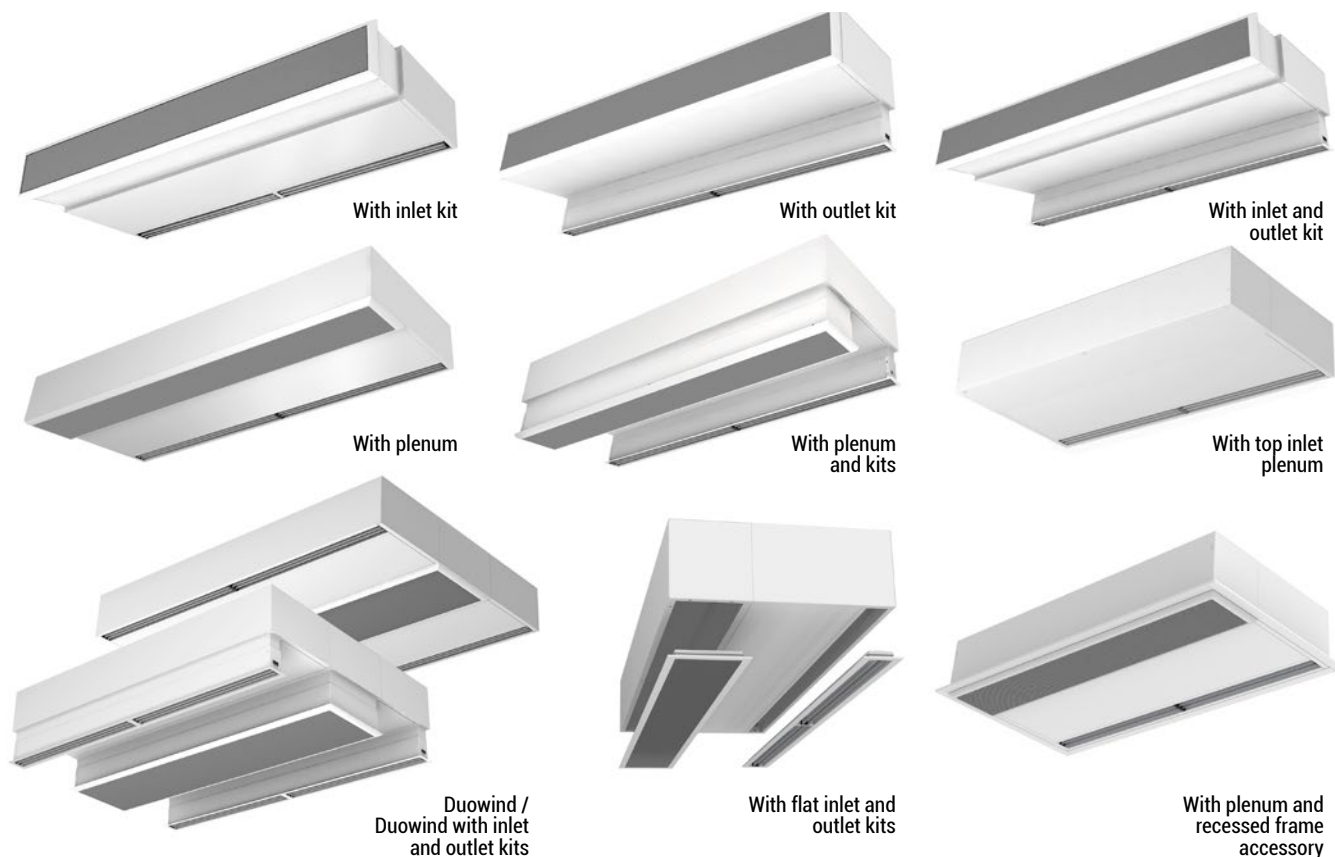


## Optional accessories

### Supports and installation

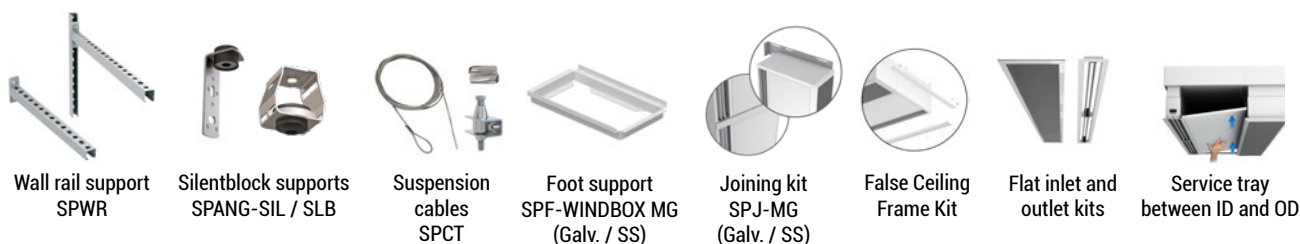

### Control

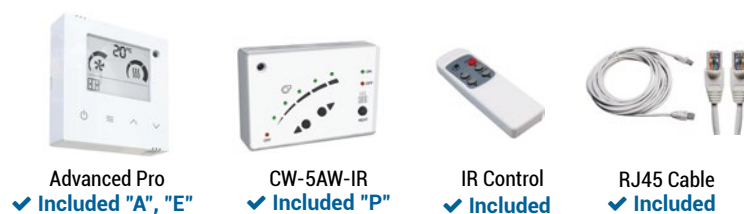

### Sensors

