


Control DX
Elemento "B9", Condición "00" velocidad no disponible
Elemento "C5", Condición "00" frío y calor.
Salida 3 modo 8 Desescarche
Elemento "C8", Condición "00" sonda interior
Function "B9", Condition "00" Locked Speed
Function "C5", Condition "00" Cool&Heating
OUT 3 mode 8 Defrost
Function "C8", Condición "00" inlet temperature

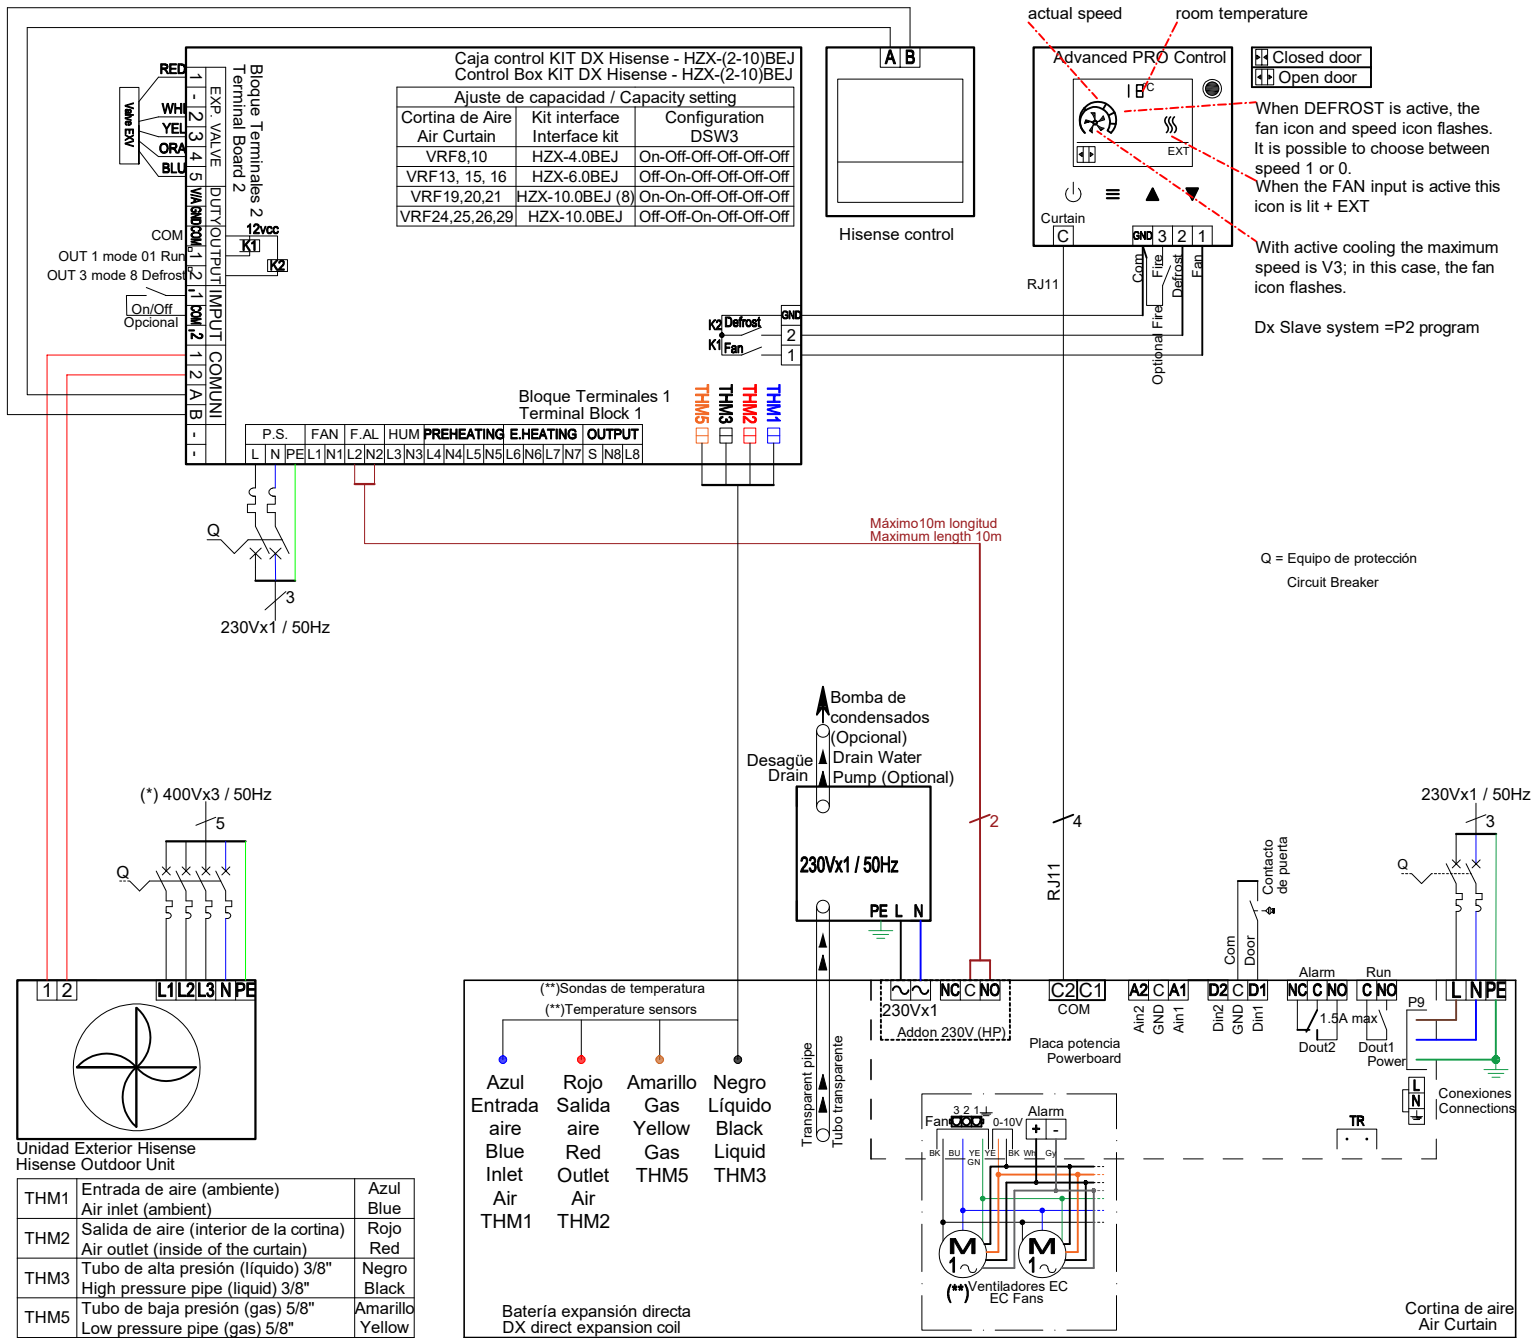

(*) Available 230Vx1 depending to the outdoor unit model

(**) Temperature sensors already installed in the direct expansion coil

Air curtain, Slave DX controller and Kit-DX cannot be separated more than 10m (free voltage signal)

ESQUEMA ELÉCTRICO CORTIN

ESQUEMA ELÉCTRICO CORTINA DE AIRE

Cortina aire ventiladores EC con Bomba Calor - Hisense VRF Calor y Frío, Kit HZX-(2-10)BEJ , RJ11 Slave DX
EC fans air curtain with Heat Pump - Hisense VRF Heating&Cooling, HZX-(2-10)BEJ kit, RJ11 Slave DX

Página/Page 1 de/of 1

Doc. AIRDOE12456

R00 - 07/07/25