

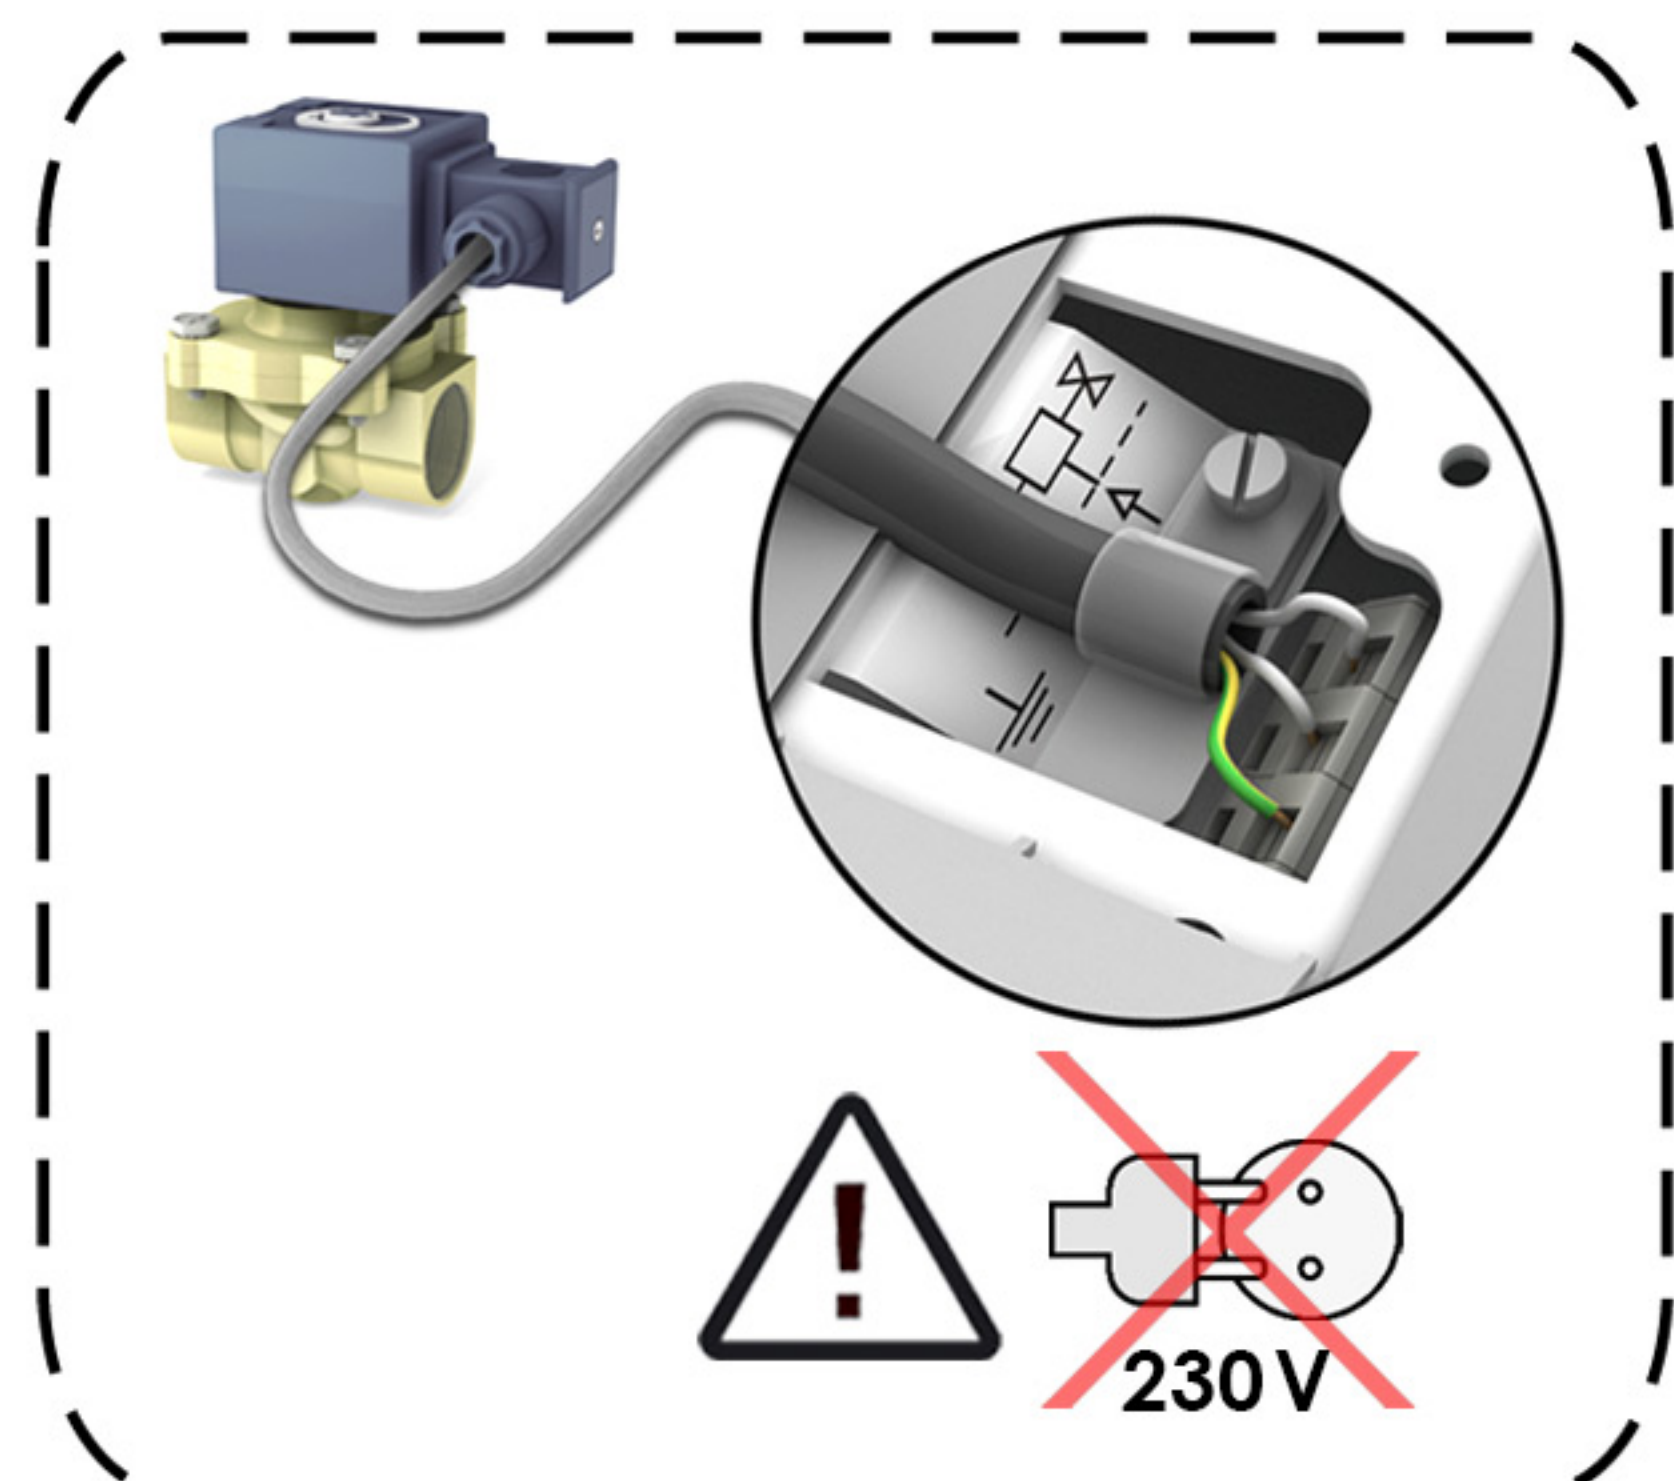


OPTIONAL SOLENOID VALVE


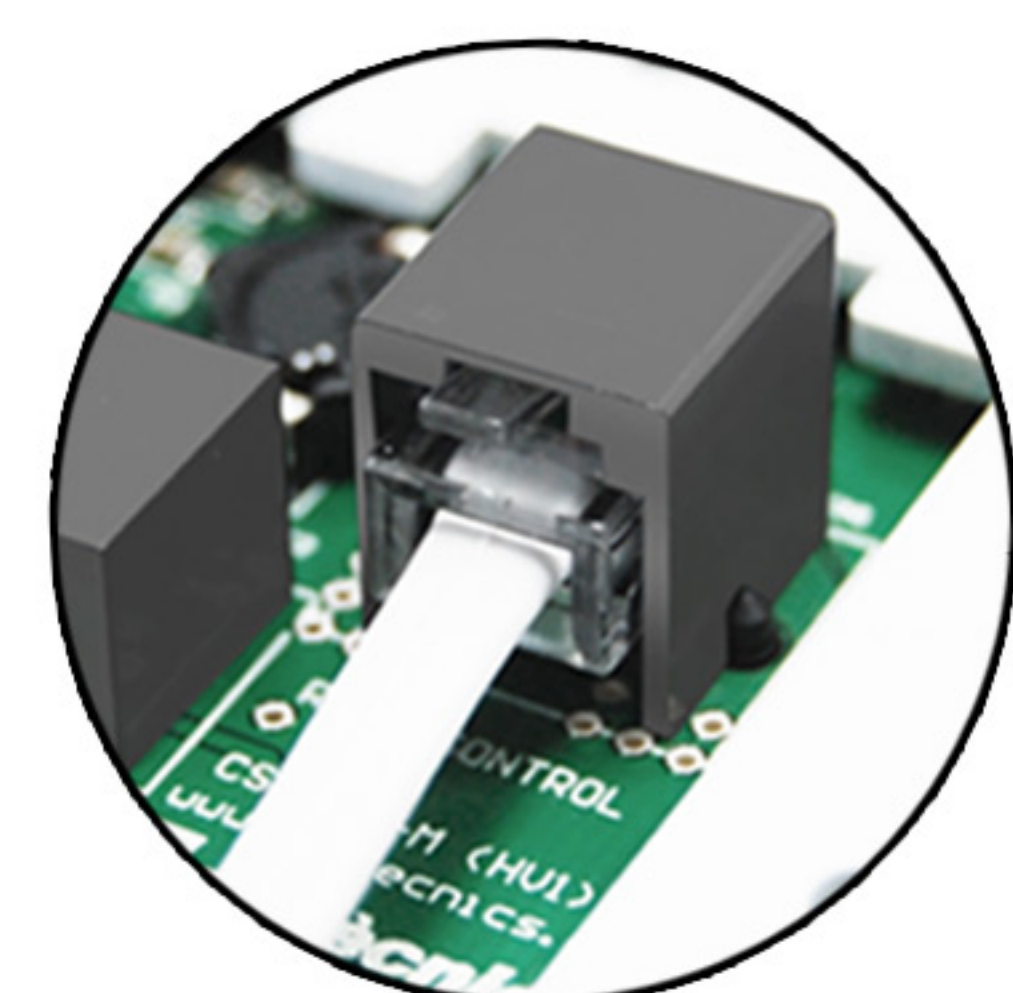


8 PINS CONNECTORS RJ45

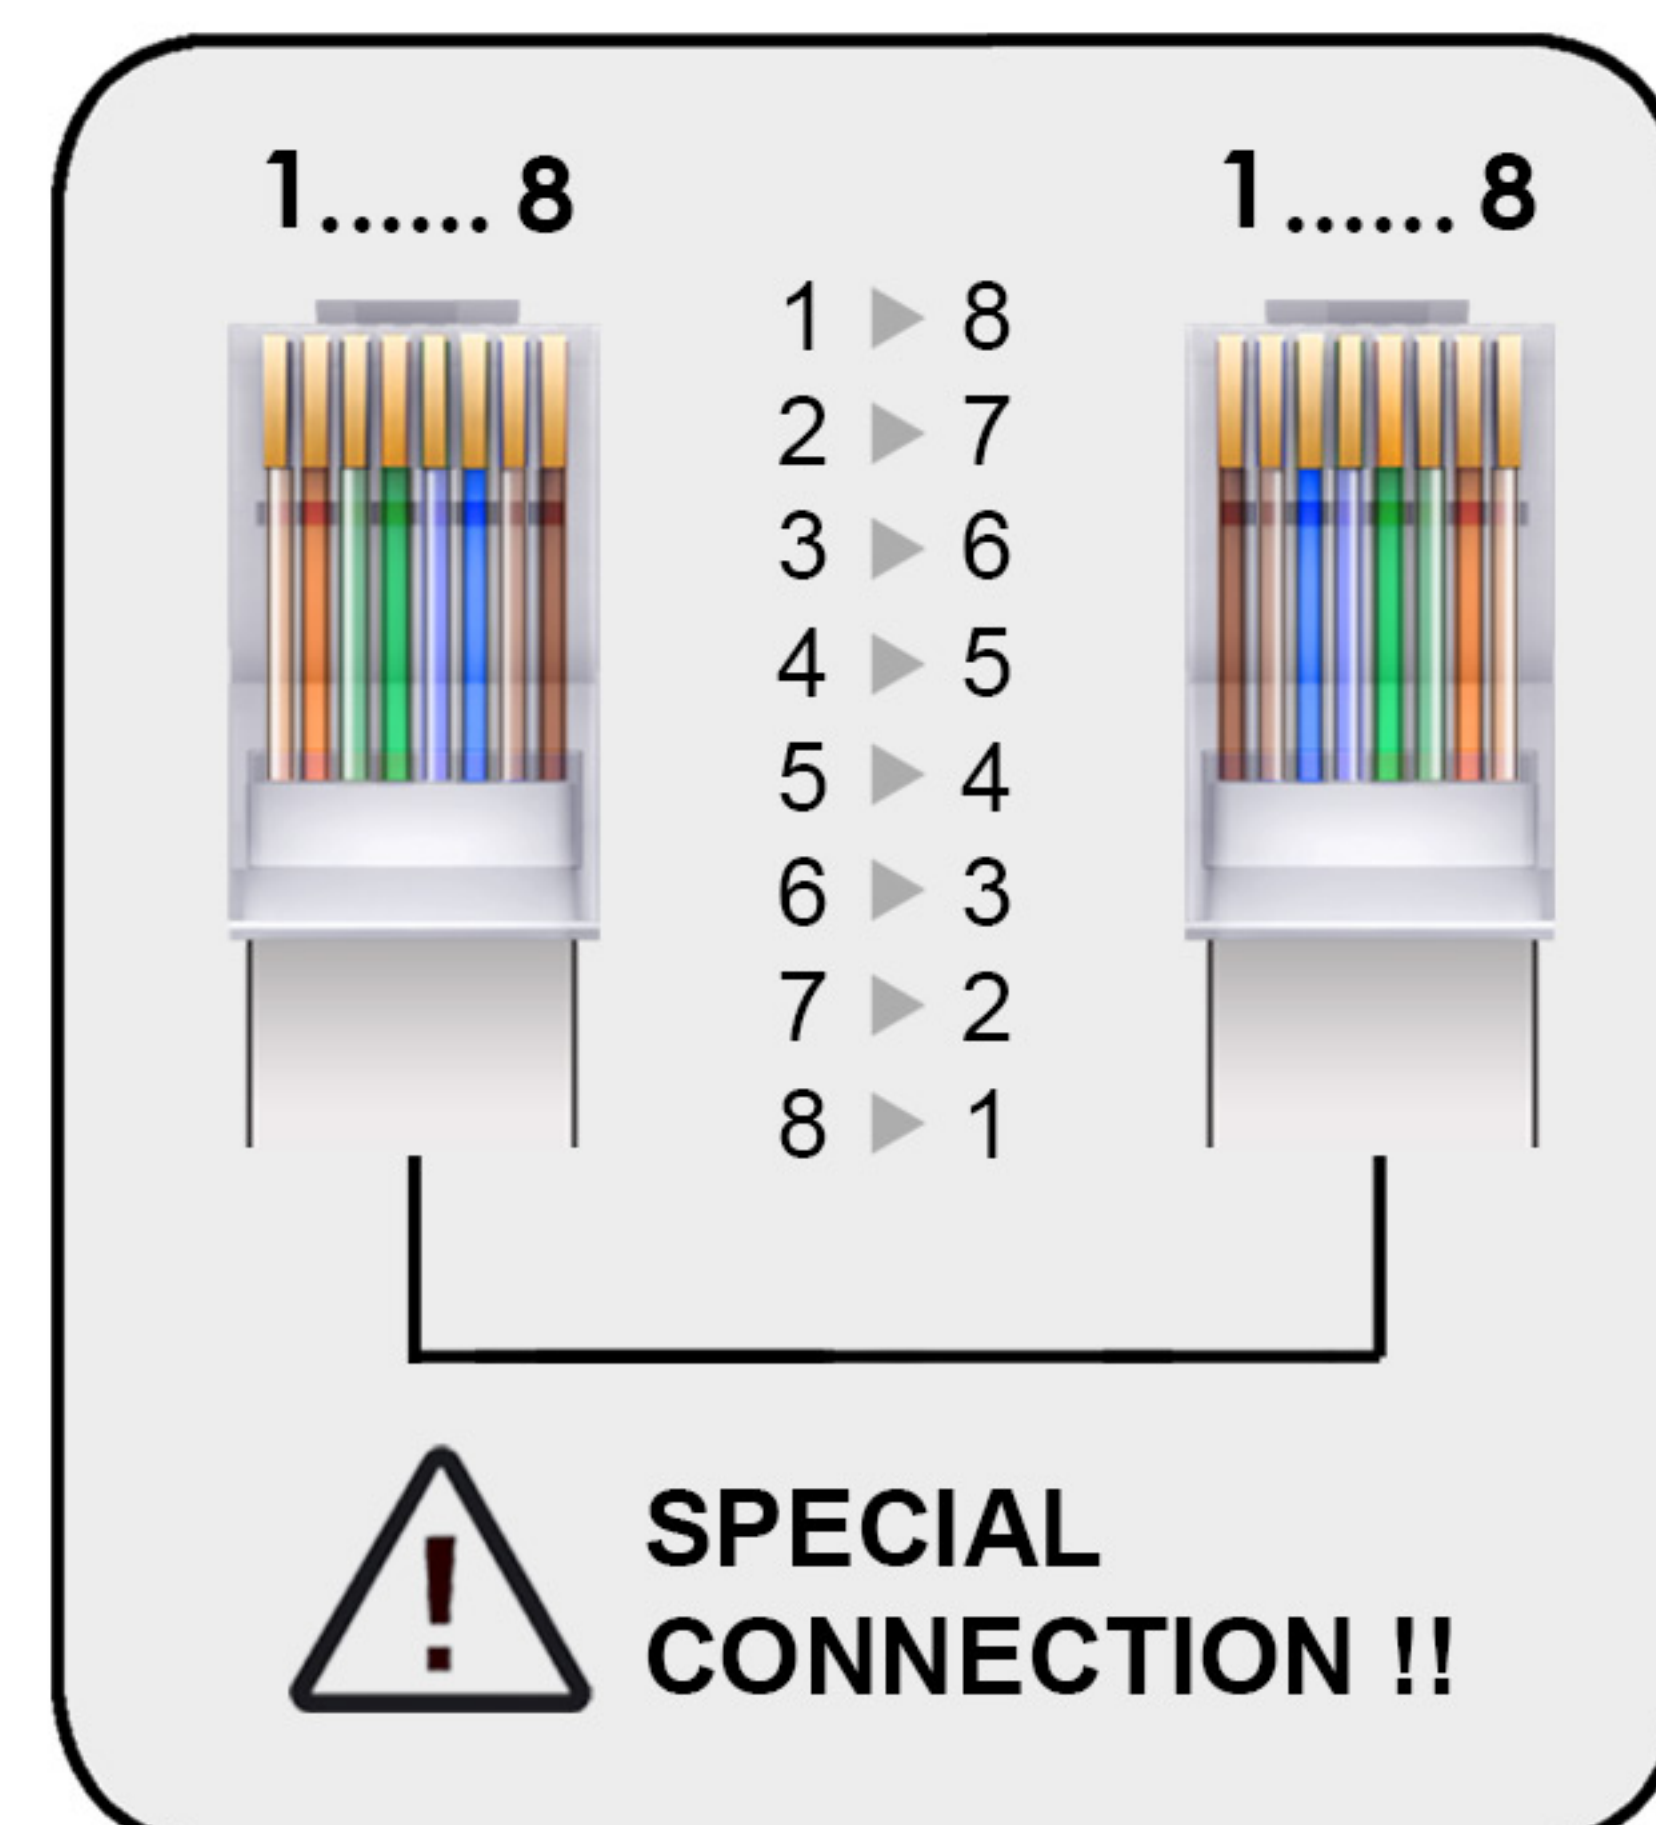


CONTROL

10 m CABLE

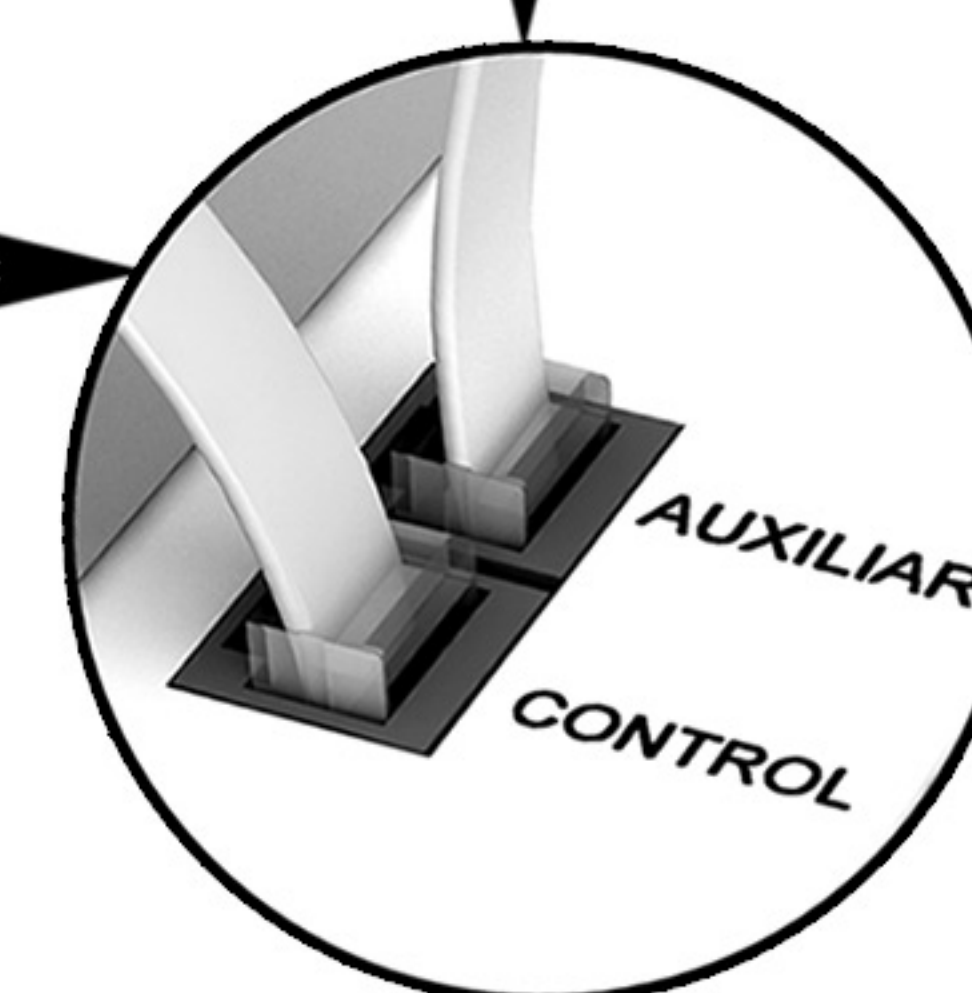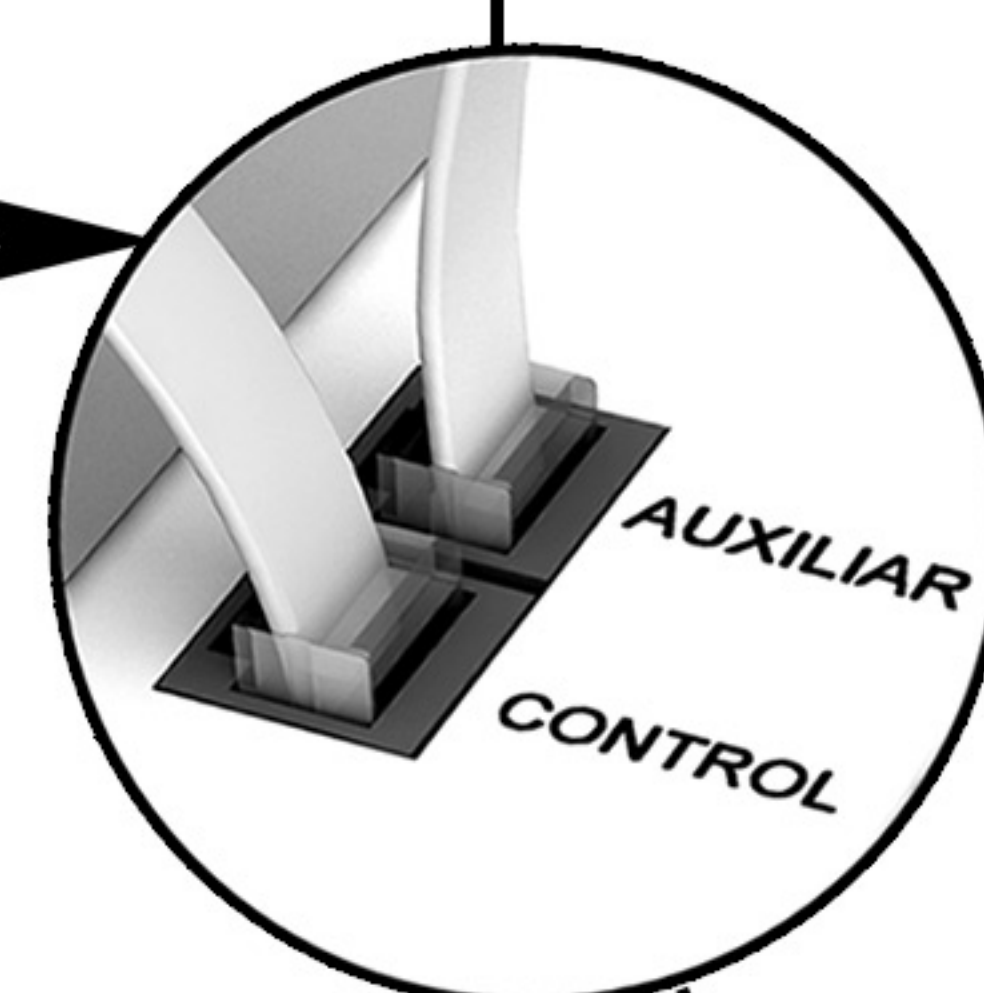


UNIT 2
(OPTIONAL)

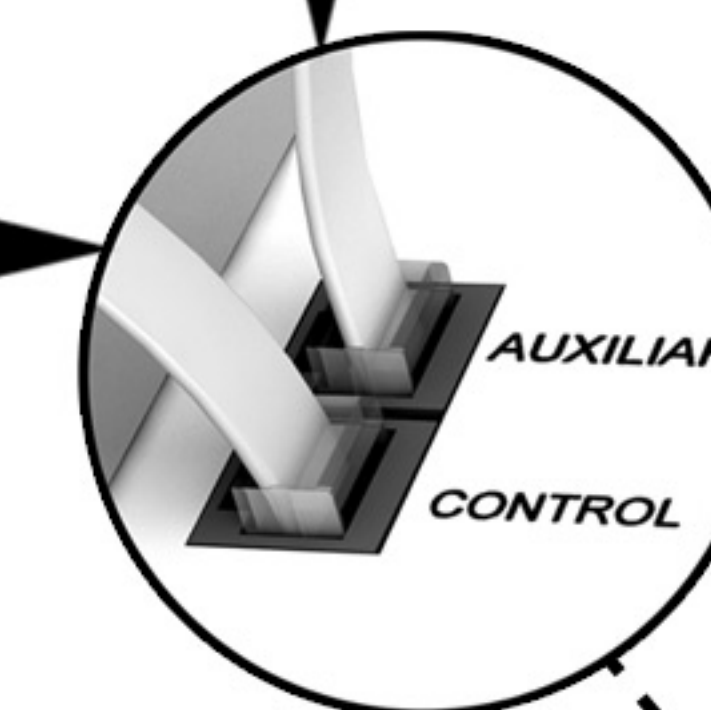

UNIT 3
(OPTIONAL)

TO UNIT 4, 5 ... UP TO 12

CONNECTION BOX

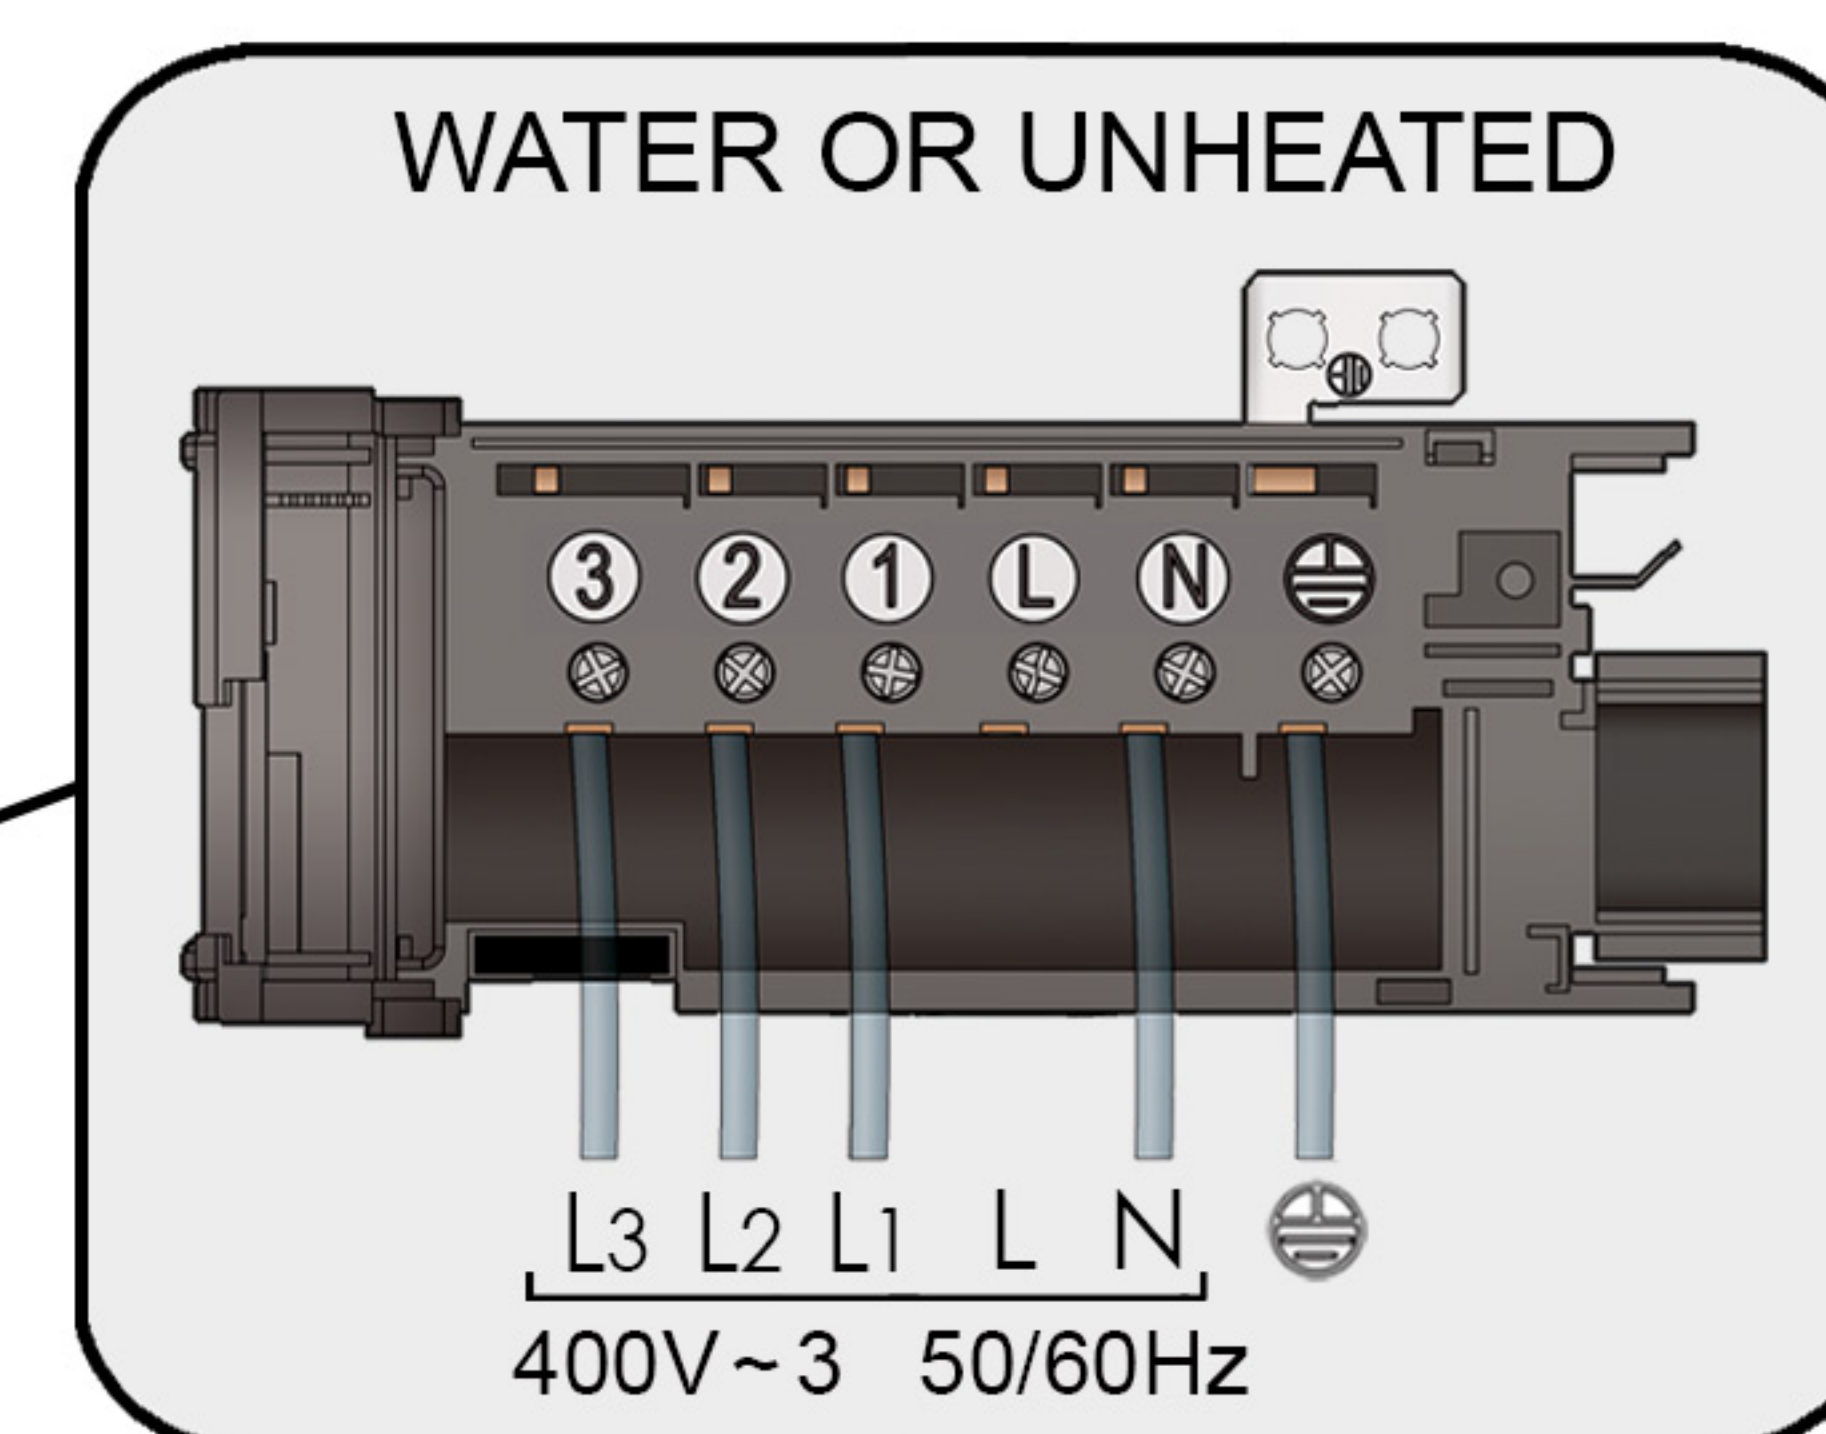


3~PHASES



CLEVER

STANDARD

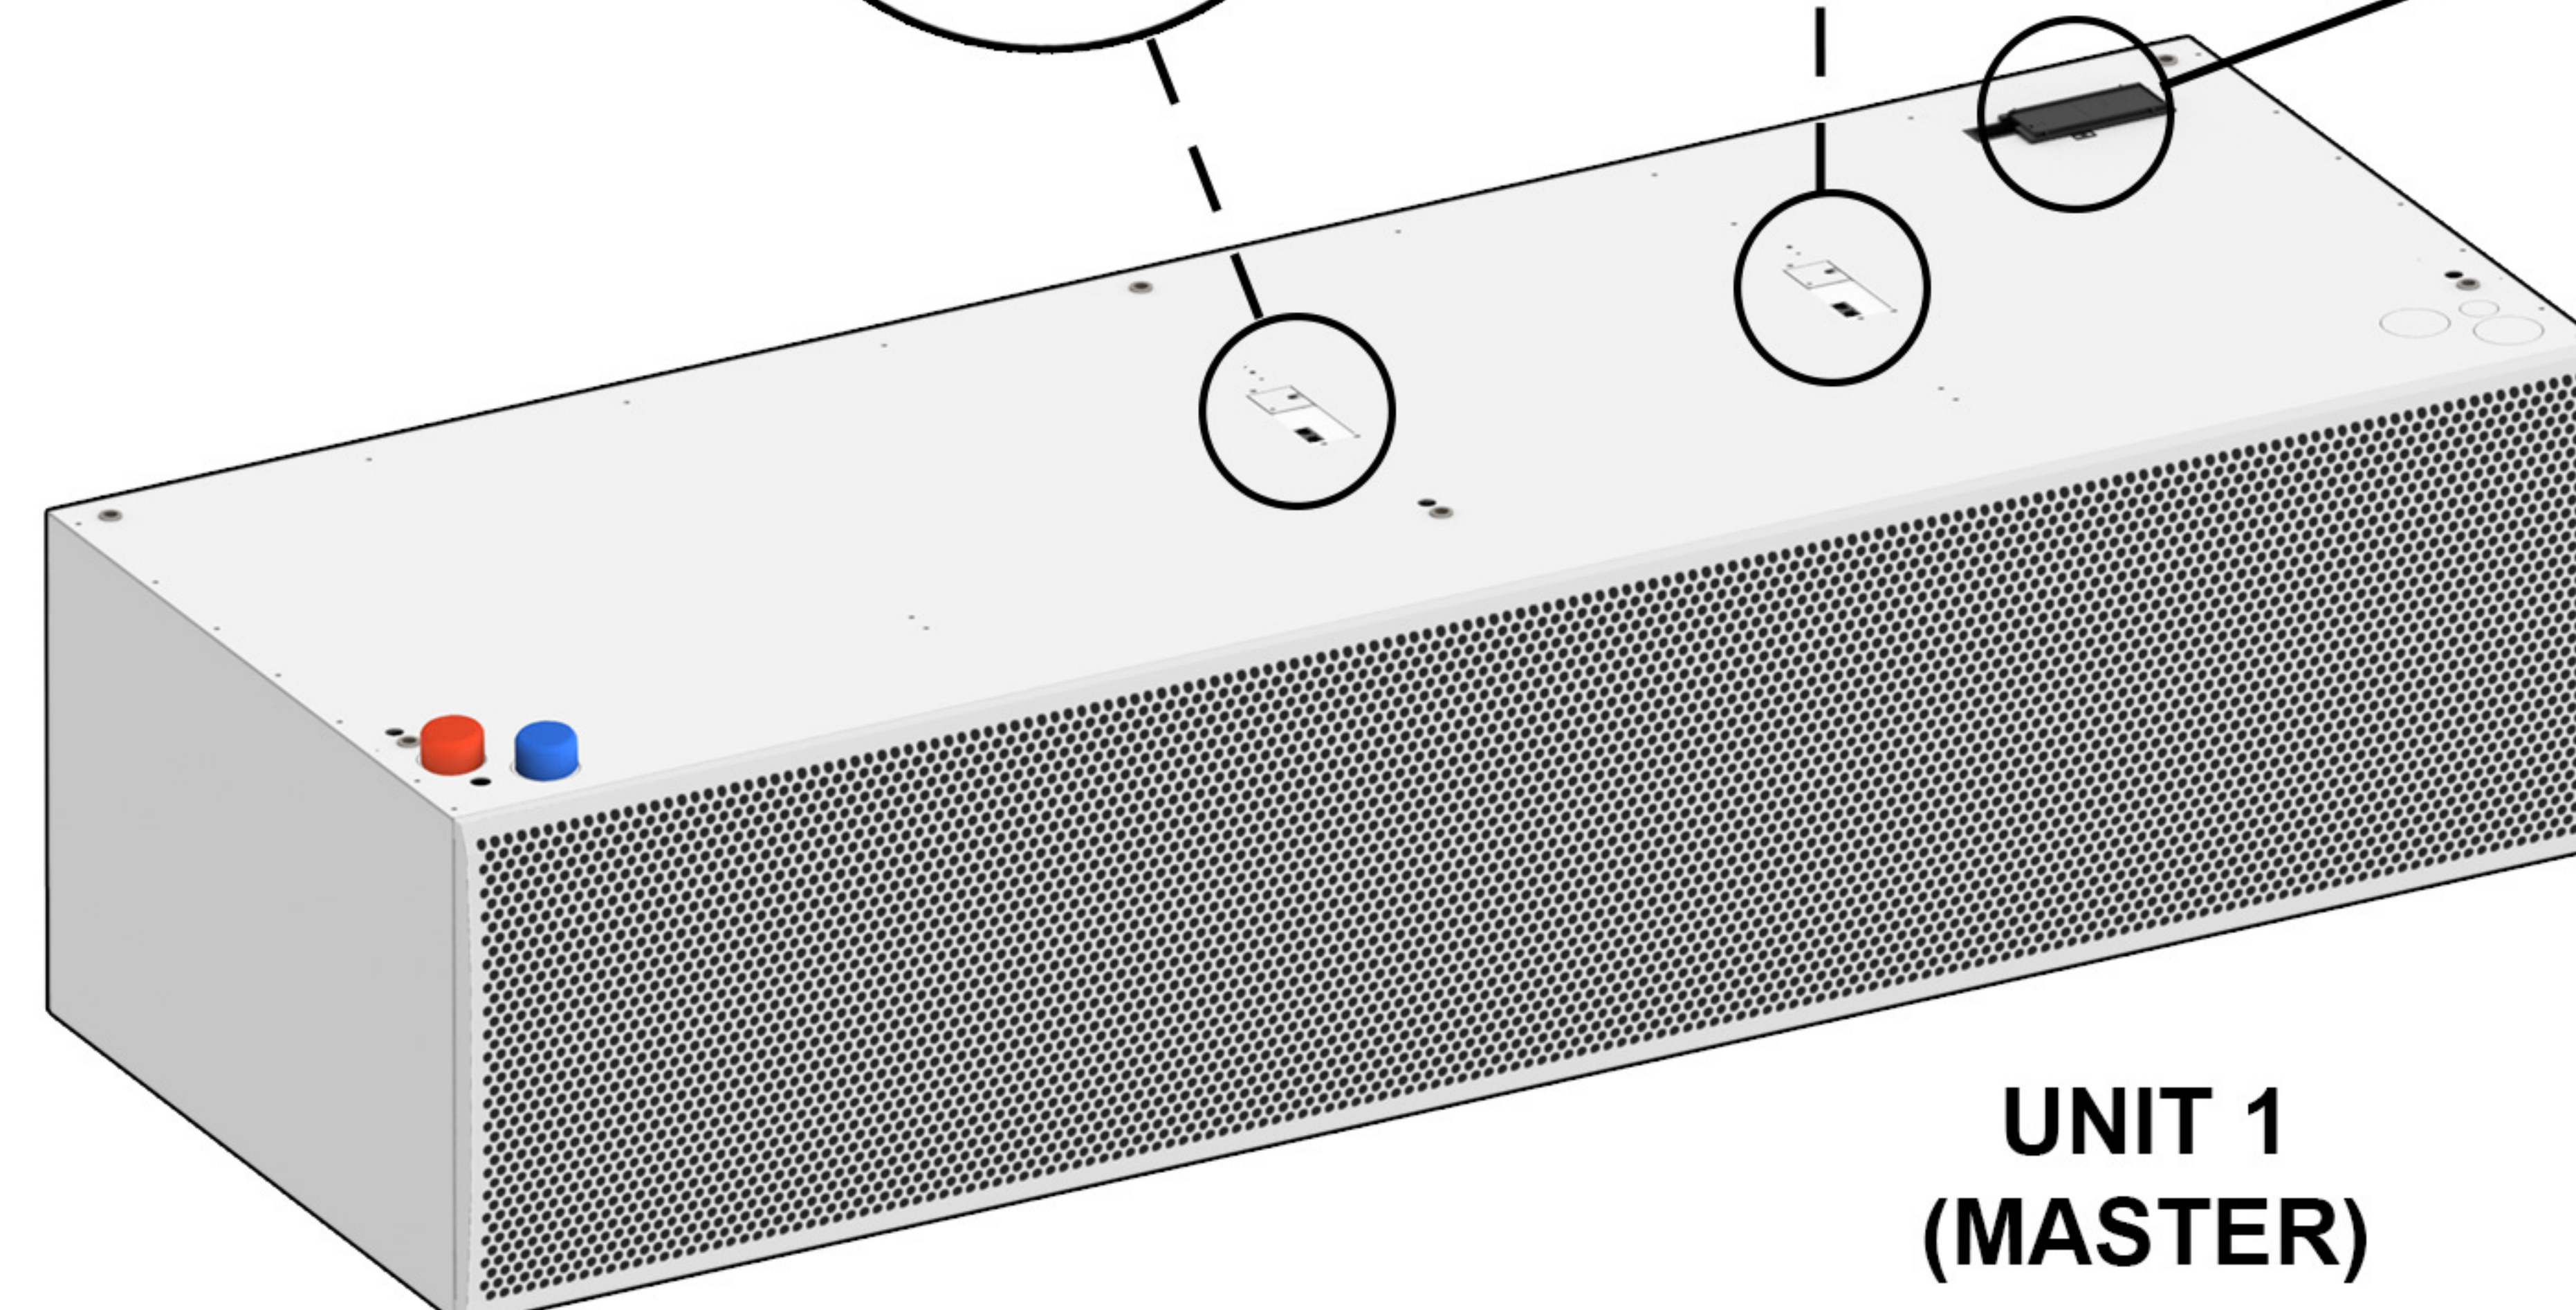

UNIT 1
(MASTER)

Windbox L,XL models with 2 PCB

50 Hz	L	-	2500	3000
	XL	-	2500	3000
60 Hz	L	-	2500	3000
	XL	2000	2500	3000