



Technical Features



RAL 9016 standard



Other colors on request



Range
Up to 3,5 m



Heating type
Unheated



Casing
Galvanised steel



Airflow / Length
1150 - 1725 m³/h
0,6 m to 0,9 m



Heating capacity
-



Inlet grille
Slotted perforated



Fans
Centrifugal
2-speed



Control
Inbuilt LED keypad with
IR remote control



Outlet lamellas
Aluminium, airfoil type

COMPACT FLY is the most compact model from the insect control air curtains range. It has been specially designed to prevent flying insects from entering drive-thru windows, food shops, toll booths or kiosks.

Double-inlet centrifugal fans driven by an external rotor motor and low noise level. Large faceted inlet grille avoiding intensive maintenance. It incorporates two stages of ventilation: Comfort Mode, with a softer jet, and Insect Mode, with a more powerful jet.

Included regulation with infrared remote control and inbuilt keypad with leds.

In case of outdoor installation, the air curtain must be adequately protected from the weather. In addition, the electrical connections of the air curtain must be housed in a watertight box and it is recommended to protect the cabinet with AQUA AERO paint or stainless steel (see options).

❄ UNHEATED



Model	Airflow m ³ /h	Ventilation power 230V~50Hz W	Ventilation current 230V~50Hz A	Noise Level (5 m) dB(A)	Weight kg
COMPACT FLY 600 A	1150	318	1,43	51/67	13
COMPACT FLY 900 A	1725	478	2,15	52/68	18,5







Selection program



Dimensions

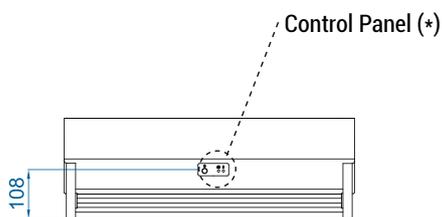

(*) Manual regulation using inbuilt keypad or by infrared remote control.

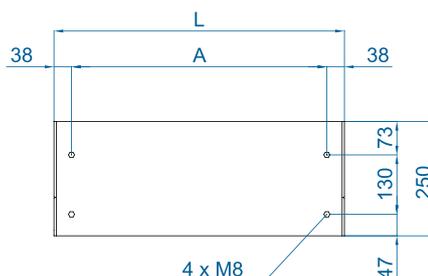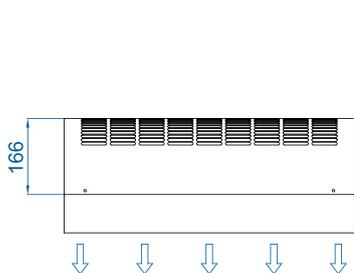

	L	A
COMPACT FLY 600	630	554
COMPACT FLY 900	930	854

Optional accessories

Supports and installation



Omega wall support

Silentblock supports
SPANG-SIL / SLB

Control



IR Control
✓ Included

CAD drawings, BIM files, installation manuals and other documentation

