




Characteristics

Backward curved centrifugal fans with custom frontal panel, ready to be coupled directly to the client equipment, thus adapting to all possible needs. Robust thanks to its galvanised steel structure and aluminium profile supports, it has a front panel with integrated suction ring available on request. The speed of the various models can be regulated in different ways, either by a transformer or by an electronic signal.




- High efficiency radial back blade fans with robust galvanized steel frame and aluminum profile supports.
- "Plug-fans" prepared to connect directly to ventilation equipment or various applications according to customer needs, facilitating the assembly on the equipment.
- Front fixing panel with integrated suction ring, custom OEM on request.
- Direct connections to the fan.
- RMAC models: variable speed AC fan through transformer regulation.
- RMEC models: 0-100% variable speed EC fan through electronic regulation via 0-10V signal.

Specifications

Model	(V (50 Hz))	(A)	(W)	(rpm)	(m³/h)	(Pa)
RMAC 19240	330					
RMAC 22550	470					
RMAC 25050	610					
RMAC 315101	246					
RMEC 19240 G9	730					
RMEC 22043 G9	720					
RMEC 22563 G9	690					
RMEC 25050 G9	690					
RMEC 25050 V8	780					
RMEC 28050 V8	850					
RMEC 28080 V8	520					
RMEC 33788 V8	680					



Dimensions

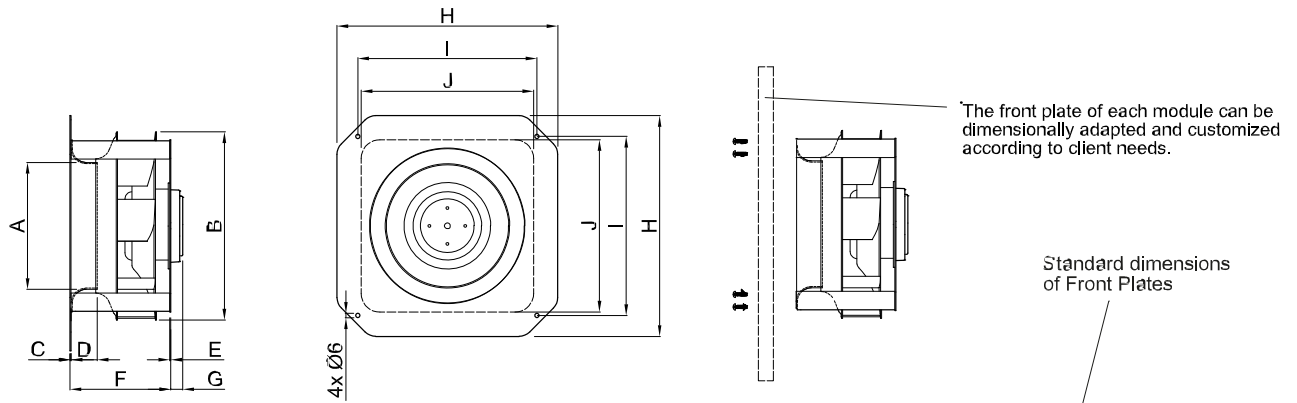

Model	Dimensions (mm)									
	A	B	C	D	E	F	G	H	I	J
RMAC 19240	Ø128	Ø192	1,5	25	1,5	96	-	□223,4	□187,4	□190
RMEC 19240 G9			1,5	25	1,5	96	16			
RMEC 22043 G9	Ø155	Ø220	1,5	35	1,5	107	16	□296	□240	□231
RMAC 22550		Ø227	1,5	35	1,5	135	-			
RMEC 22563		Ø225	1,5	35	1,5	135	16			
RMAC 25050	Ø170	Ø250	1,5	35	1,5	138	-	□296	□240	□231
RMEC 25050 G9			1,5	35	1,5	135	16			
RMEC 25050 V8			1,5	35	1,5	135	39			
RMEC 28080 V8	Ø192	Ø280	1,5	35	2	165	39	□320	□268,7	□260
RMAC 315101	Ø195	Ø315	1,5	55	2	209	-	□380	□330	□321
RMEC 33788 V8	Ø205	Ø337	1,5	48	2	201	39	□400	□350	□327