




Characteristics

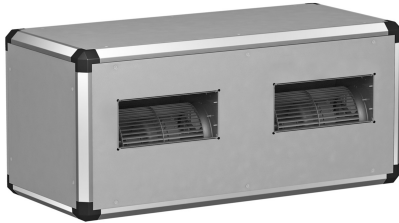

- Casing made of extruded aluminium
- Panels made of galvanized steel with internat insulation 25 mm thick
- All panels can be registered
- External rotor motor protected through thermal contact
- 0-100% variable speed
- Wide range of regulation
- On request: with prefilter at the inlet mounted inside the unit

Specifications

Model	(V (50 Hz))	(A)	(kW)	(rpm)	(m³/h)	(Pa)
AIRBOX 33/2-1332	410					
AIRBOX 33/2-1462	520					
AIRBOX 33/2-1464	145					
AIRBOX 43/2-7/74	280					
AIRBOX 43/2-7/76	125					
AIRBOX 43/2-7/94	260					
AIRBOX 54/2-9/74	360					
AIRBOX 54/2-9/94	360					
AIRBOX 54/2-9/96	170					
AIRBOX 64/2-10/104	500					
AIRBOX 64/2-10/104D	500					
AIRBOX 64/2-10/106	250					