




Characteristics

The energy loss caused by loading and unloading in refrigerated trucks has very high costs for carriers. Therefore, the Airtrack air curtain has been specially designed to avoid these losses, achieving fuel savings of up to 30%.

The compact size, the three-step fixing system and the adaptable length from 850 mm to 2430 mm make it easy to install on any type of vehicle, from vans to trailers. In addition, a perforated grille facilitates basic maintenance of the air curtain.

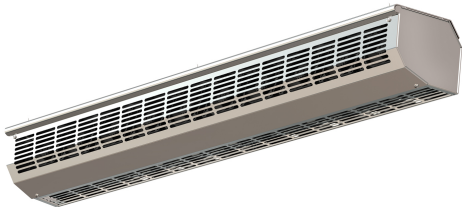

- Compact air curtain specially designed for vehicles that carry air conditioned loads.
- Savings up to 30% in fuel consumption.
- Self-supporting aluminium frame.
- Includes bracket with quick-fixing system for ceiling installation.
- Perforated inlet grille to avoid intensive maintenance service.
- Compact low voltage 24V DC fans designed to operate between -25 °C and 50 °C.
- Customised curtain length from 850 mm to 2,430 mm to suit any type of transport vehicle: vans, trucks, trailers, vehicles with roll-up doors, etc.

Specifications

50Hz

Model	Air Flow (m³/h)	Unheated		Weight (kg)
		Current fans (A)	Power fans (kW)	
AIRTRACK 2430	2000	7,0	0,190	14
AIRTRACK 1000	830	3	0,072	5,8

Dimensions

