




Characteristics

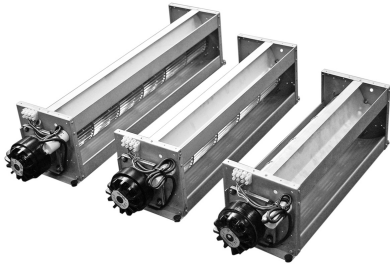

- External rotor motor 100% regulable protected through thermal contact
- Standard ball bearings
- Low noise level
- Intermediate dimensions optional
- Several options: FCS execution outlet air 45°, FCL execution outlet air 90°
- Some models require a minimum quantity purchasing order

Specifications

Model	(V (50 Hz))	(A)	(W)	(rpm)	(m³/h)	(Pa)
FCL 100/1030/15U	42					
FCL 100/1230/15U	42					
FCL 100/400/12U	42					
FCL 100/500/12U	43					
FCL 100/600/14U	45					
FCL 100/800/14U	40					
FCL 133/1030/M80	87					
FCL 133/1230/M80	83					
FCL 133/400/15U	102					
FCL 133/500/15U	100					
FCL 133/600/15U	96					
FCL 133/830/15U	90					
FCL 80/1030/14U	27					
FCL 80/400/12U	27					
FCL 80/500/12U	27					
FCL 80/600/12U	27					
FCL 80/830/14U	27					