




Characteristics

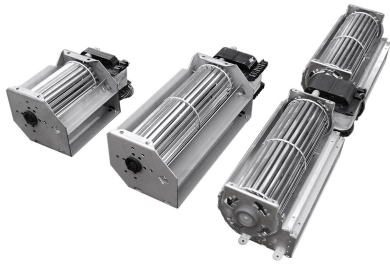

- Universal shaded ring motor
- Bronze auto-lubricated bearings
- Low noise level
- Intermediate dimensions optional
- Some models require a minimum quantity purchasing order

Specifications

Model	(V (50 Hz))	(A)	(W)	(rpm)	(m³/h)	(Pa)
FCL 60/120/M25	45					
FCL 60/180/M25	48					
FCL 60/180+180/M38	47					
FCL 60/240/M38	47					
FCL 60/240+240/M38	44					
FCL 60/300/M38	48					
FCL 60/300+300/M38	44					
FCL 60/360/M38	51					
FCL 60/360+360/M38	40					
FCL 60/420/M38	54					
FCL 60/420+420/M38	40					