




### Characteristics

The air handling units are designed according to the particular needs of each installation. They can be configured with any type of battery, heat recuperators, for air conditioning and maximum efficiency.

They have a low noise profile thanks to the insulation of the panels with which they are mounted, which are also all accessible for maintenance records. The air flow they generate is totally adjustable and they have fans with external rotor motor with a thermocontact protector.

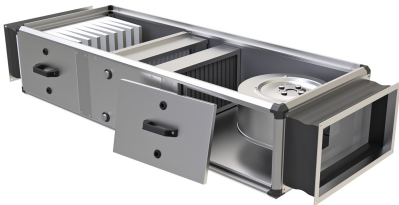

- Casing made of extruded aluminium of triple chamber
- Casing made from galvanized steel sandwich type with internal fiberglass insulation 20 mm thick
- All panels can be registered
- External rotor motor protected through thermal contact
- 0-100% variable speed
- Low noise level
- Executions and characteristics according to customer needs. There can be included filters of all the efficiencies, shutters, heat/cold elements, recuperators, etc.