


- SW2 + SW3-2 Configuración tabla en función capacidad
- SW7-2 OFF Trabajo según temperatura aspiración/retorno
- SW3-4 en On. La salida FAN está en ON con defrost activo, velocidad limitada por el switch 7 del DX Slave (Velocidad 1 o 0)
- SW2 + SW3-2 Table configuration depending on Capacity
- SW7-2 OFF Works with suction/return Temperature

PAC	Unit heating capacity	VRF Air Curtain	Switches	
			SW2	SW3-2
AH125	P100	VRF10, 12	Off, Off, On, Off, On, Off	Off
	10-12.5kW			
	P125	VRF13, 15, 16	On, Off, Off, On, On, Off	
AH250	12.5-16kW	VRF19, 20, 21	Off, Off, Off, On, Off, On	
	P200	VRF24, 25		
	18-25kW	VRF26, 29, 30	Off, On, Off, Off, On, On	
	P250			
	25-31.5kW			

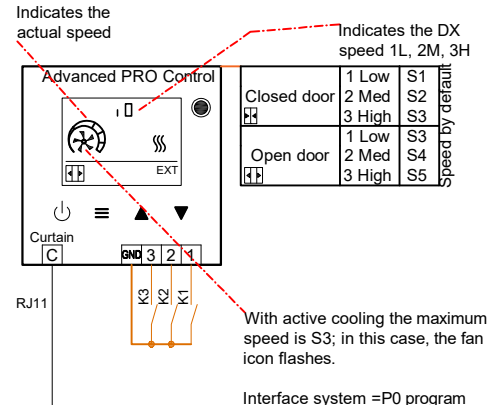

Q = Equipo de protección
Circuit Breaker

Regleta Connector			Cable Wire
TBY	M1, M2 S	Unidad Exterior Outdoor Unit	No incluido (1mm2) Not included (1mm2)
TBY	1, 2	Control Mitsubishi DX Mitsubishi DX Control	No incluido (1mm2) Not included (1mm2)
TBX	TH21	Sonda detección temperatura: Ambiente Temperature detection sensor: Ambient	Cable incluido Cable included
TBX	TH22	Sonda de alta presión (líquido capilar) High pressure sensor (liquid capillary)	Cable incluido Cable included
TBX	TH23	Sonda de baja presión (gas) Low pressure sensor (gas)	Cable incluido Cable included
TBX	TH24	Sonda detección temperatura: Ambiente Temperature detection sensor: Ambient	Cable incluido Cable included
TBX	A11 A12	Alarma, cerrado=OK. Abierto=error code 4109 Alarm, Closed=OK. Open=error code 4109	No incluido (1mm2) Not included (1mm2)
TB4	D23 D24	Fan, 230v=fan On. Fan, 230v=fan On.	No incluido (1mm2) Not included (1mm2)
TB4	D31 D32	Defrost, 230v=defrost On. Defrost. 230v=defrost On.	No incluido (1mm2) Not included (1mm2)

La cortina de aire, el control Slave DX y el Kit-DX deben estar en un radio de 10m (señales libres de potencial)
Air curtain, Slave DX controller and Kit-DX cannot be separated more than 10m (free voltage signals)

Cortina aire ventiladores EC con Bomba Calor - Mitsubishi VRF Calor y Frio, Kit PAC-AHxxxM-J , RJ11 Interface Slave
EC fans air curtain with Heat Pump - Mitsubishi VRF Heating&Cooling, PAC-AHxxxM-J kit, RJ11 Interface Slave