




Characteristics

The Optima Switch air curtain is designed for spaces that need a practical, effective solution without unnecessary complexity, yet with the reliability of a solid, well-built unit. Its galvanized steel frame finished in RAL 9016 white gives it a clean, professional appearance, while the micro-perforated front grille works as a regenerable filter, simplifying maintenance and ensuring consistent performance day after day.

Behind its discreet design, the Optima Switch features linear diffusers with airfoil aluminum blades and low-noise tangential fans with “twisted” profile turbines. Also available in an air-only version, it delivers a uniform, well-directed airflow ideal for everyday environments.

With its built-in two-speed control and compatibility with a door contact and external OFF connection, it adapts naturally to the pace of any space, offering comfort and efficiency with every opening.

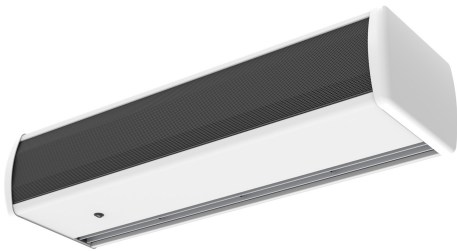

- Self-supporting casing construction made of galvanized steel plate, finished in structural epoxy-polyester painting white colour RAL9016 as standard. Other colours are available on request.
- Micro-perforated inlet grille with filter functions and easy service. It does not need prefilter.
- Anodized aluminium outlet vanes, airfoil shaped.
- Low noise twisted cross-flow fans driven by a 2-speed external rotor motor.
- “A” type without heating, air only.
- Includes 2-speed in-built switch.
- Allows door contact and external OFF connection.

Specifications

50Hz

Model	Unheated	
	Nominal Airflow (m³/h)	Recommended Installation Range (m)
OPT SW 1000 A	1500	2.8
OPT SW 1500 A	2150	2.8
OPT SW 2000 A	2900	2.8



Dimensions

