




Characteristics

The Optima Switch Recessed air curtain is designed to blend seamlessly into false ceilings, delivering an effective and elegant solution for spaces that require comfort without adding visible elements. Its solid construction and regenerable micro-perforated grille ensure reliable performance with minimal maintenance and a completely clean aesthetic.

Inside, the linear diffusers with airfoil blades and low-noise tangential fans with “twisted” profile turbines work smoothly to provide a uniform, quiet airflow. Also available in an air-only version, the Optima Switch Recessed strikes the perfect balance between performance, efficiency, and discretion. With integrated two-speed control and compatibility with a door contact, it adapts effortlessly to the daily flow of the space.

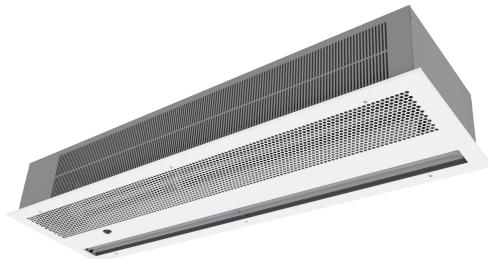

- Self-supporting casing construction made of galvanized steel plate, ready to be installed recessed in a false ceiling.
- Inlet grille (free of maintenance) integrated in a single white frame colour RAL 9016 or black RAL 9005. Other colours are available on request.
- Anodized aluminium outlet vanes, airfoil shaped.
- Low noise twisted cross-flow fans driven by a 2-speed external rotor motor.
- “A” type without heating, air only.
- Includes 2-speed in-built switch.
- Allows door contact and external OFF connection.

Specifications

50Hz

Model	Unheated	
	Nominal Airflow (m³/h)	Recommended Installation Range (m)
RO SW 1000 A	1700	2.8
RO SW 1500 A	2200	2.8
RO SW 2000 A	3200	2.8

Dimensions

